


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Meade County. Sec. 1 Twp. 34S Rge. 27W (E) (W)
Location as "NE/CNW/SE" or footage from lines C NW 1/4 SE 1/4
Lease Owner Oil & Gas Property Management, Inc.
Lease Name Henry Classen Well No. 1
Office Address 6th Floor C&I Life Bldg., Houston, Texas 77002
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 2-20 19 65
Application for plugging filed 2-20 verbal 19 65
Application for plugging approved 2-20 verbal 19 65
Plugging commenced 2-20 19 65
Plugging completed 2-20 19 65
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production - 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott - Sublette, Kansas
Producing formation - Depth to top - Bottom - Total Depth of Well 6153 Feet
Show depth and thickness of all water, oil and gas formations.

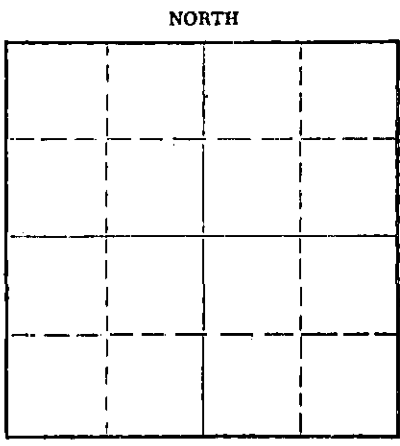

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUR IN	PULLED OUT
				8-5/8"	1460'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud to 1410'
25 sacks cement at 1410'
25 sacks cement at 595'
15 sacks cement fr 40' to surface

RECEIVED
STATE CORPORATION COMMISSION

MAR 11 1965

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Earl F. Wakefield
Address 515 Union Center Bldg., Wichita, Kansas

STATE OF TEXAS, COUNTY OF HARRIS, ss.
Tom E. Bailey (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Tom E. Bailey
6th Floor C&I Life Bldg., Houston, Texas
(Address)

SUBSCRIBED AND SWORN to before me this 8 th day of March, 19 65

My commission expires 6/1/65 Georgia Mae Popp Notary Public.

LEASE: HENRY CLASSEN #1	LOCATION: C NW SE
OWNER: OIL & GAS PROPERTY MANAGEMENT, INC.	SECTION 1-34S-27W
CONT: EARL F. WAKEFIELD	MEADE COUNTY, KANSAS
COMM: 2-2-65	CASING: 8 5/8" Set @ 1459'
COMP: 2-20-65	

Sand & Clay	160
Red Bed	320
Red Bed & Anhydrite	1264
Red Bed & Shells	1460
Shale	1655
Shale & Lime streaks	2020
Shale & Shells	2354
Lime & Shale	2950
Lime	3080
Lime & Shale	3400
Lime - Chalk - Shale	3650
Shale & Chalk	3724
Lime & Shale	3890
Lime	4025
Lime & Shale	4714
Lime W/streaks Shale	4805
Lime & Shale	5045
Lime	5625
Lime & Shale	5678
Lime	5855
Lime - Shale & Sand	5950
Shale & Sand	5960
Lime & Shale	6035
Lime	6153
R.T.D.	6153

RECEIVED
 STATE CORPORATION COMMISSION
 MAR 11 1965
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I, FRED S. BARKER, DO HEREBY CERTIFY THAT THE ABOVE IS A TRUE AND CORRECT COPY OF THE DRILLER'S LOG ON THE HENRY CLASSEN #1, LOCATED IN THE C NW SE OF SECTION 1-34S-27W, MEADE COUNTY, KANSAS.

EARL F. WAKEFIELD

BY Fred S. Barker

SUBSCRIBED AND SWORN TO BEFORE ME THIS 24TH DAY OF FEBRUARY, 1965.

MY COMMISSION EXPIRES:
JANUARY-25, 1969

Wanda Th. Riley
 NOTARY PUBLIC