

15-175-20112-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Seward County, Sec. 18 Twp. 34S Rge. 31W (E) (W)

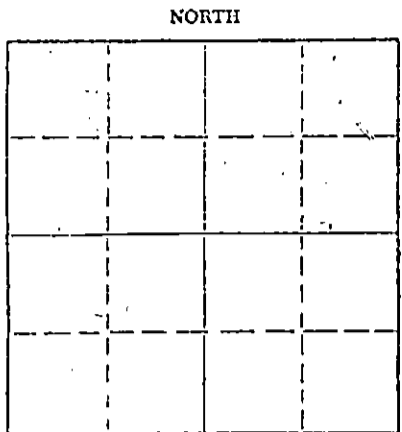

Locate well correctly on above Section Plat

Location as "NE/CNWSW" or footage from lines _____
Lease Owner Leben Oil Corporation
Lease Name Doll Well No. 1
Office Address Box 486, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 3/11/ 19 72
Plugging completed 3/12/ 19 72
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well _____
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mix 25 sks. cement and 1 sk. hulls to plug off perms at 5,916' & 4,402'
Plug went by 4,402'
Recement with 10 sks. cement. Pump 1st plug to 5,707' and 2nd plug to 3,211'.
Pump 35 sks. cement at 900' to 800'.
Put 15 sks. cement at 45' to 0'.

RECEIVED
STATE CORPORATION COMMISSION
MAR 21 1972
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor SARGENTS CASING PULLING SERVICE
Address Box 506, Liberal, Kansas 67901

STATE OF KANSAS, COUNTY OF SEWARD, ss.
ROBERT SARGENT (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. SARGENTS CASING PULLING SERVICE
(Signature) Robert Sargent, Partner
Box 506, Liberal, Kansas 67901
(Address)

SUBSCRIBED AND SWORN to before me this 17th day of March, 19 72

Mona M. Clark
Notary Public.

My commission expires _____

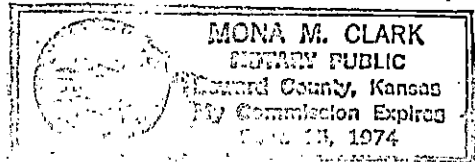


WELL LOG 15-175 20112-00-00

Company Leben Drilling, Inc.
Contractor Leben Drilling, Inc.
Farm Doll #1
Total Depth 6405'
Commenced 7-17-70
Completed 8-7-70

Sec. 18 T. 34S R. 31W
Loc. 75' W. of C SW
County Seward

Casing 8 5/8" 24# New Casing set @ 1483'
w/625 sxs. 50/50 Poz. 6% Gel 2% C.C.
Production 225 Sxs. Common 2% G.C.
Producer



Figures Indicate Bottom of Formations


41	Surface Soils
340	Sand, Shells & Red Bed
885	Sand & Red Bed
1483	Red Bed & Shale
1483	Anhydrite
2555	Anhydrite & Shale
2746	Anhydrite
3078	Lime & Shale
3253	Dolo. Shale
4838	Lime & Shale
4923	Lime & Shale, Sand
6212	Lime & Shale
6269	Lime
6323	Lime & Shale
6405	Lime
<u>6405</u>	<u>RTD</u>

RECEIVED
STATE CORPORATION COMMISSION
MAY 17 1972
CONSERVATION DIVISION
Wichita, Kansas

State of Kansas
County of Barton

SS

I, James R. Rodgers of Leben Drilling, Inc., upon oath state that the above and foregoing is a true and correct copy of the log of the Doll #1 Well.



James R. Rodgers

Subscribed and sworn to before me this 15th day of August, 1970

My Commission Expires:
November 13, 1973

Helen L. Lindenmuth