

15-175-20174-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

Seward County, Sec 2 Twp 34S Rge 31 (E) (W) X
Location as "NE/CNW/SE/SW" or footage from lines C NW 1/4 SE 1/4
Lease Owner Venus Oil Company
Lease Name Shafer Heirs Well No. 1
Office Address 1200 NBC Building, San Antonio, Texas 78205
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed August 25 19 71
Application for plugging filed December 10 19 73
Application for plugging approved January 3 19 74
Plugging commenced February 4 19 74
Plugging completed February 7 19 74
Reason for abandonment of well or producing formation Depleted reservoir

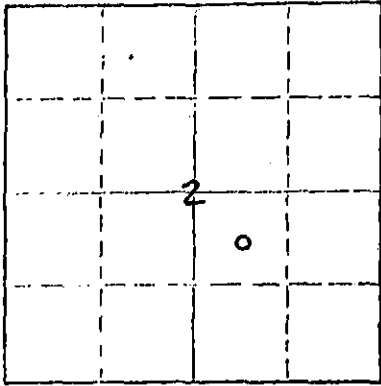

Locate well correctly on above
Section Flat

If a producing well is abandoned, date of last production December 19 73
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ed Eves
Producing formation Marmation Depth to top 5119 Bottom 5124 Total Depth of Well 5228.55 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				7"	5227	2585
				10-3/4	1349	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pump 25 sks. of cement @ 5020
Spotted 40 sks. of cement @ 800 to 700
Put 15 sks. of cement @ 35 to 0

RECEIVED
STATE CORPORATION COMMISSION
APR 15 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Sargents Casing Pulling Service Kansas No. 511
Address Box 506 Liberal, Kansas 67901

STATE OF Texas COUNTY OF Bexar, ss.

RICHARD RICHTER

(employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

1200 NBC Bldg.; San Antonio, Texas 78205

(Address)

Subscribed and Sworn to before me this 10th day of April, 1974

My commission expires June 1, 1975

Maggie M. Lindquist
In and For Bexar County, Texas Notary Public.
MAGGIE M. LINDQUIST
Notary Public, Bexar County, Texas

Venus Oil Company
Hutchinson, Kansas

Drlg. Contractor: Stickle Drilling Company Shafer Heirs #1
Date Commenced: 21 July 1971 SE/4 2-34S-31W
Date Completed: 5 August 1971 Seward County, Kansas

DRILLER'S LOG

Depth figures indicate base of formation:


Sand	580
Red Bed, Gyp and Sand	1225
Shale and Anhydrite	1480
Anhydrite and Shale	1555
Red Bed and Anhydrite	2225
Anhydrite and Lime	2429
Anhydrite	2560
Dolomite	2983
Lime and Shale	3115
Dolomite	3175
Lime and Shale	3370
Lime	3743
Lime and Shale	3921
Shale	4135
Shale and Lime	4414
Lime	4704
Lime and Shale	4824
Lime	5047
Lime and Shale	5055
Lime	5271
Lime and Shale	5360
Lime	5445
Lime and Shale	5858
Lime	6070 RTD

RECEIVED
STATE CORPORATION COMMISSION
APR 15 1974
CONSERVATION DIVISION
Wichita, Kansas

I, Clifford M. Smith, hereby certify that to the best of my knowledge and belief, the above is a true and complete Driller's Log of Venus Oil Company's Shafer Heirs #1 in Seward County, Kansas.

Clifford M. Smith

Clifford M. Smith



Freida E. Widick

Freida E. Widick, Notary Public
My Commission Expires 23 June 1974