

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-129-10581-00-00
Spot: NESE Sec/Twnshp/Rge: 30-34S-43W
1980 feet from S Section Line, 660 feet from E Section Line
Lease/Unit Name: USA CLINTON Well Number: F-2
County: MORTON Total Vertical Depth: 4540 feet

Operator License No.: 30535
Op Name: HARTMAN OIL CO., INC.
Address: 12950 E. 13TH
WICHITA, KS 67230

Production Casing Size: 7 feet: 4512 WITH 750 SX CMT
Surface Casing Size: 10.75 feet: 1214 WITH 800 SX CMT

47 55

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/22/2003 10:30 AM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: STAN MITCHELL Company: HARTMAN OIL Phone: (316) 636-2090

Proposed Plugging Method: 1ST PLUG AT 4100' WITH 100 SX CMT. 2ND PLUG AT 1230' WITH 40 SX CMT. 3RD PLUG PERFORATE 7" AT 800' & CIRCULATE TO SURFACE.

Plugging Proposal Received By: STEVE DURRANT WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 09/22/2003 3:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:


PBTD 4475'. PERFS AT 4446-72'. PERFORATE 7" @ 810'. 1ST PLUG RUN IN HOLE WITH 2 3/8" TUBING TO 4113'. PUMPED 125 BBL SALT WATER TO FLUSH CASING INTO LINED PIT. PUMPED 100 SX CMT AT 4113'. GOOD CIRCULATION. 2ND PLUG PULL OUT OF HOLE WITH 2 3/8" TUBING TO 1350'. LOAD HOLE & PUMP 50 SX CMT. GOOD CIRCULATION. PULL OUT OF HOLE WITH 2 3/8" TUBING. RIG UP TO 7" CASING, CIRCULATE HOLE THROUGH PERFORATIONS AT 810'. PUMP 275 SX CMT FROM 810' TO SURFACE, FILLING 7" CASING & BACKSIDE. REMOVED FLUID FROM LINED PIT.

RECEIVED
OCT 14 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. NO CASING RECOVERED.

Plugged through: TBG

District: 01

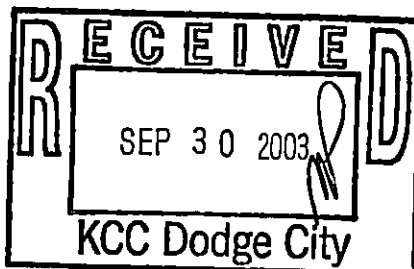

Signed

Jim Holland PARTA
(TECHNICIAN)

INVOICE
DATE 10-14-03
INV. NO. 2004060618

Form CP 123