

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-119-20240-00-00
Spot: NWNWNW Sec/Twnshp/Rge: 11-35S-29W
330 feet from N Section Line, 330 feet from W Section Line
Lease/Unit Name: ADAMS RANCH Well Number: 5-11
County: MEADE Total Vertical Depth: 6054 feet

Operator License No.: 32581
Op Name: EXCO RESOURCES, INC.
Address: 6500 GREENVILLE AVE.-SU 600, LB 17
DALLAS, TX 75206

Production Casing Size: 5.5 feet: 6054 WITH 325 SX CMT
Surface Casing Size: 8.625 feet: 1480 WITH 800 SX CMT

\$ 196⁷⁶

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/26/2003 10:45 AM
Plug Co. License No.: 32833 Plug Co. Name: SARGENT LILLARD CASING PULLING, INC.
Proposal Rcvd. from: KIRBY LILLARD Company: SARGENT LILLARD CASING PULL Phone: (580) 254-1881

Proposed Plugging Method: CIBP @ 4375' WITH 2 SXC MT. PLUG AT 1510' WITH 50 SX CMT. PLUG AT 700' WITH 30 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE MIDDLETON WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 09/26/2003 1:30 PM KCC Agent: STEVE MIDDLETON

Actual Plugging Report:


PBTD 5150'. PERFS AT 4436-46'. CIBP @ 4375' WITH 2 SX CMT ON TOP. 1ST PLUG LOAD HOLE WITH MUD. PULL TO 1510' & PUMP 50 SX CMT. 2ND PLUG PULL TO 700' & SPOT 30 SX CMT. 3RD PLUG PULL TO 40' & SPOT 10 SX CMT.

RECEIVED
OCT 14 2003
KCC WICHITA

Remarks: USED COMMON CMT BY SARGENT & LILLARD. RECOVERED 2586' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

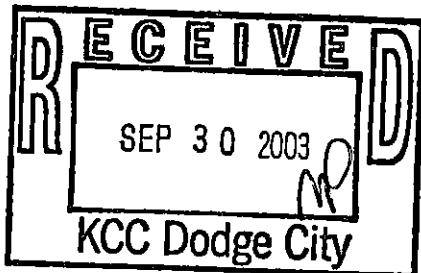

Signed _____

[Handwritten Signature]

(TECHNICIAN)
INVOICED
DATE 10-14-03
REF. NO. 2004060615

Form CR-23
[Handwritten Signature]