

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-119-20157-00-00
Spot: NENW Sec/Twnshp/Rge: 10-35S-29W
660 feet from N Section Line, 1980 feet from W Section Line
Lease/Unit Name: ADAMS RANCH Well Number: F-1
County: MEADE Total Vertical Depth: 6754 feet

Operator License No.: 32581
Op Name: EXCO RESOURCES, INC.
Address: 6500 GREENVILLE AVE.-SU 600, LB 17
DALLAS, TX 75206

Production Casing Size: 4.5 feet: 6530 WITH 400 SX CMT
Surface Casing Size: 8.625 feet: 1540 WITH 675 SX CMT

#219⁵¹

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/24/2003 9:30 AM
Plug Co. License No.: 32833 Plug Co. Name: SARGENT LILLARD CASING PULLING, INC.
Proposal Rcvd. from: KIRBY LILLARD Company: SARGENT LILLARD CASING PULL Phone: (580) 254-1881

Proposed Plugging Method: CIBP @ 5000 WITH 2 SX CMT. PLUG AT 1560' WITH 50 SX CMT. PLUG AT 690' WITH 30 SX CMT. PLUG AT 40-0' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 09/24/2003 2:00 PM KCC Agent: STEVE MIDDLETON

Actual Plugging Report:


PBTD 6060'. PERFS AT 5060-67'. CIBP @ 5000' WITH 2 SX CMT ON TOP. 1ST PLUG PULL TO 1560'. LOAD HOLE WITH MUD & SPOT 50 SX CMT. 2ND PLUG PULL TO 690' & SPOT 30 SX CMT. 3RD PLUG PULL TO 40' & SPOT 15 SX CMT. STAYED FULL.

RECEIVED
SEP 29 2003
KCC WICHITA


Remarks: USED COMMON CMY BY SARGENT & LILLARD. RECOVERED 2836' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

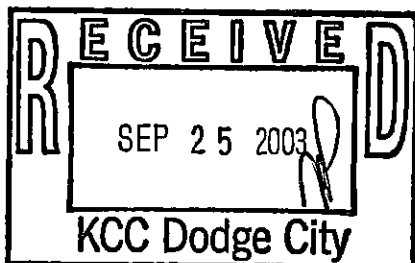

Signed



(TECHNICIAN)

INVOICED
DATE 9.29.03
INV. NO. 2004060555

