

State of Kansas

FORM - CP-2



JOHN ANDERSON, Jr. Governor
 RICHARD C. BYRD Chairman
 ALVIN F. GRAUERHOLZ Commissioner
 HARRY G. WILES Commissioner
 RAYMOND B. HARVEY Secretary
 CHARLES C. McCARTER Gen. Counsel

State Corporation Commission
 CONSERVATION DIVISION
 (Oil, Gas and Water)
 500 Insurance Bldg. 212 N. Market
 WICHITA, KANSAS

VERBAL PERMIT FORM
 (To Be Filed By Plugging Agent)

RECEIVED
 STATE CORPORATION COMMISSION
 FEB 25 1964
 CONSERVATION DIVISION
 Wichita, Kansas

J. P. Roberts
 Assistant Director
 500 Insurance Building
 212 North Market
 Wichita 2, Kansas

Dear Sir:

Mr. Parris of Anadarko Production Co. has this date requested permission to plug the following described well:

Mr. Parris guarantees payment of the plugging fee.

Operator's full Name: Anadarko Production Co.

Complete Address: Box 351 Liberal, Kansas

Lease Name: Heintz Well No. C-1

Location: C NW NW Sec. 26 Twp. 33S Rge. (E) (W) 41

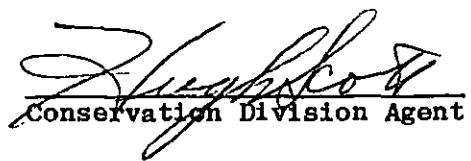
County Morton Total Depth 5728' Oil Well X

Gas Well Input Well SWD Well D & A X Lost Hole

Mr. Parris was instructed to plug the well as follows:

- 8 5/8" - 1429' Circulated w/cement.
- Mud 5728' to 2400' Spotted 90 Sax. cement 2400' to 2100'
- Mud 2100' to 700' Spotted 35 Sax. cement 700' to 600'
- Mud 600' to 40' Plug, Hulls, 15 Sax. cement 40' to 0

Very truly yours,


 Conservation Division Agent