


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Seward County. Sec. 14 Twp. 35S Rge. 32 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines

C NE NW
Lease Owner J. M. Huber Corporation
Lease Name Feese Well No. 1
Office Address 2450 Liberty Tower, Okla. City, Okla. 73102
Character of Well (Completed as Oil, Gas or Dry Hole)

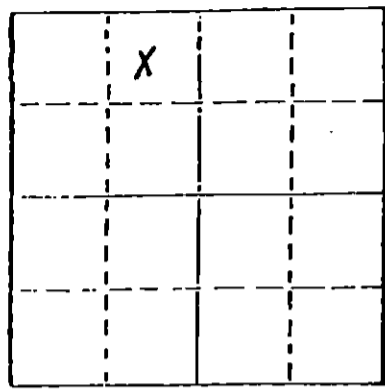

Gas
Date Well completed 5/24 19 51
Application for plugging filed 6/9 19 78
Application for plugging approved 6/13 19 78
Plugging commenced 8/19 19 78
Plugging completed 9/8 19 78
Reason for abandonment of well or producing formation

Reserves depleted
If a producing well is abandoned, date of last production
May 19 77

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas
Producing formation Morrow Depth to top 5946' Bottom 5968' Total Depth of Well 6122'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Lansing-Kansas City	Water	4450	5200	5-1/2"	5921'	4800'
Marmaton	Water	5300	5600	7"	6126'	2710'
Cherokee	Water	5600	5920			
Morrow	Gas	5920	TD			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set. Moved in Sargent Casing Pullers. Spotted 20 sack cement plug from 5800-5970'. Shot 5-1/2" casing off at 4800' and pulled same. Shot 7" casing off at 2710', pulled 7" casing to 2300' and spotted 35 sack cement plug from 2300'-2200'. Spotted 35 sack cement plug from 600-500' with 7" casing. Pulled a total of 2710' of 7-1/2" casing. Spotted 15 sack cement plug from 40-3'. Placed mud in hole from 5800-2300', 2200-600' and 500-40' during plugging operations. Cut off 9-5/8" & 13-3/8" casing 3' below ground level and welded steel plate on top to seal the hole.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sargent Casing Pullers

STATE OF Oklahoma COUNTY OF Oklahoma, ss.
Paul M. Walker (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Paul M. Walker
2450 Liberty Tower, Okla. City, Okla. 73102
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of September, 1978

Betty J. Twist
Betty J. Twist Notary Public.

My commission expires Oct. 28, 1978

RECEIVED
STATE CORPORATION COMMISSION

SEP 18 1978

CONSERVATION DIVISION
Wichita, Kansas