


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Seward County, Sec. 11 Twp. 35 Rge. 32 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C-E/2 of NW 14

Lease Owner Crescent Petroleum Corp.
Lease Name Light Estate Well No. 1
Office Address 1600 Lincoln, Suite 2526, Denver, CO
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

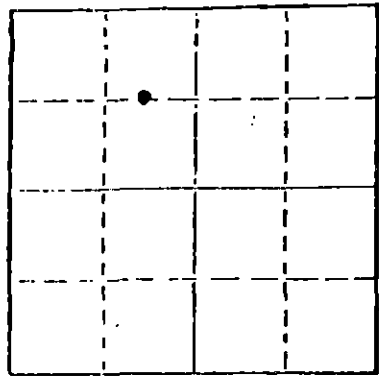

Locate well correctly on above
Section Plat

Date Well completed 19
Application for plugging filed 2-16-82 19
Application for plugging approved 2-19-82 19
Plugging commenced 3-13-82 19
Plugging completed 3-17-82 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production
None 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Durrant
Producing formation Depth to top 5525 Bottom 5530 Total Depth of Well 6350
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface				8 5/8"	1610'	0'
Production				4 1/2"	5653'	4530'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped 1 sk. hulls & 15 sks. cement to 5450' Pressured to 750 lbs.
Displaced w/mud to 1600'
Pumped 50 sks. cement 1600' to 1450'
Displaced w/10 sks. Gel to 40'
Put bridge & 10 sks. cement 40' to 0'
Cut off 8 5/8", 3' below ground level

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Midwest Casing Pulling Service
Permit # 766

STATE OF KANSAS COUNTY OF HASKELL, ss.
I, Edgar J. Eves (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Edgar J. Eves
Box F, Sublette, Ks. 67877
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of March, 1982

My commission expires 12-6-84 Sondra L Eves Notary Public.

RECEIVED
STATE CORPORATION COMMISSION
MAR 23 1982
CONSERVATION DIVISION
Wichita, Kansas

SONDRA L. EVES
Haskell County, Ks.
My Appt. Exp.

SONDRA L. EVES
Haskell County, Ks.
My Appt. Exp. 12-6-84