

15-175-10181-0000

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Seward County, Sec. 2 Twp. 35S Rge. (E) 32(W)

Location as "NE/CNW/SW" or footage from lines C SW NE

Lease Owner J. M. HUBER CORPORATION

Lease Name Neff Well No. 1

Office Address P O Box 978, Liberal, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed November 30 19 54

Application for plugging filed October 22, 19 62

Application for plugging approved October 22, 19 62


Plugging commenced October 23, 19 62

Plugging completed October 25, 19 62

Reason for abandonment of well or producing formation No longer a commercial well

If a producing well is abandoned, date of last production June 25, 19 62

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

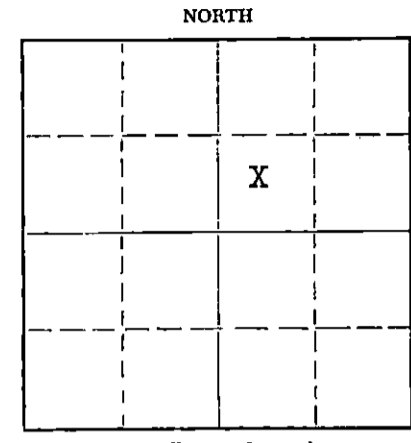

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Hugh Scott

Producing formation Morrow Depth to top 5956' Bottom 5982' Total Depth of Well 6,269 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Morrow	Oil	5956	5982	13 3/8"	400	0
				9 5/8"	2,400	0
				7"	6,014	2,611

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Put 50 sacks cement from 5,700' to T.D. (covered perforations 5,965-75')  
Filled hole with mud to 750'; put 35 sacks cement from 665' to 750'  
Filled hole with mud to 35'. Put 15 sacks cement from surface to 15'  
Welded steel plate on top of 13 3/8". Job completed 2:30 P.M. 10/25/62.

RECEIVED  
STATE CORPORATION COMMISSION

NOV 9 1962  
11-9-62  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor D A C O Lease and Well Service

Address Borger, Texas

STATE OF Kansas, COUNTY OF Seward, ss.  
Floyd L. Meade (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Floyd L. Meade

P O Box 978, Liberal, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 26th day of October, 1962

Lydia M. Woods  
Notary Public.

My commission expires August 5, 1964



J. M. HUBER CORPORATION

Neff No. 1

C SW/4 NE/4

Sec. 2-35S-32W

Seward County, Kansas

W E L L L O G

<u>From</u> - <u>To</u>	<u>Formation</u>	<u>From</u> - <u>To</u>	<u>Formation</u>
0- 400	Surface soil, Redbed, Shale, Sand 13 3/8" set @ 400'	2,896-3,078 3,078-4,610 4,610-4,686	Lime Lime & Shale Lime
400- 897	Gyp, Redbed, Shells	4,686-4,734	Lime, Chert
897-1,479	Redbed, shells, sand	4,734-5,307	Lime
1,479-1,549	Redbed, shells, lime	5,307-5,392	Lime, Shale
1,549-1,957	Shale, Redbed	5,392-5,592	Lime, Chert
1,957-2,038	Shale, Shells	5,529-5,867	Lime, Shale
2,038-2,133	Shale, Lime, Shells	5,867-5,958	Shale
2,133-2,311	Shale, Shells	5,958-5,987	Shale, Sand
2,311-2,400	Lime, Shale Set 9 5/8" @ 2,400'	5,987-6,269	Lime, Shale set 7" @ 6,014'
2,400-2,896	Lime, Shale	6,269	R T D

State of Kansas, County of Seward

I, Floyd L. Meade, do hereby certify that the foregoing is true and correct to the best of my knowledge and belief.

*Floyd L. Meade*  
Floyd L. Meade

Subscribed and sworn to before me this the 15th day of November, 1962.

*Lydial M. Woods*  
Notary Public

My Commission expires: August 5, 1964

**RECEIVED**  
STATE CORPORATION COMMISSION  
NOV 26 1962  
CONSERVATION DIVISION  
Wichita, Kansas