

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Seward County, Sec. 15 Twp. 35S Rge. 33 W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines

V-SW-1/4 SW-1/4 SW-1/4

Lease Owner Amoco Production Company

Lease Name Feather Gas Unit Well No. 1

Office Address P.O. Box 432 Liberal, KS 67901

Character of Well (Completed as Oil, Gas or Dry Hole) Gas

Date Well completed 1-3 1947

Application for plugging filed 9-24 1981

Application for plugging approved 10-21 1981


Plugging commenced 10-22 1981

Plugging completed 11-6 1981

Reason for abandonment of well or producing formation Reservoir depleted

If a producing well is abandoned, date of last production 11-11 1980

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

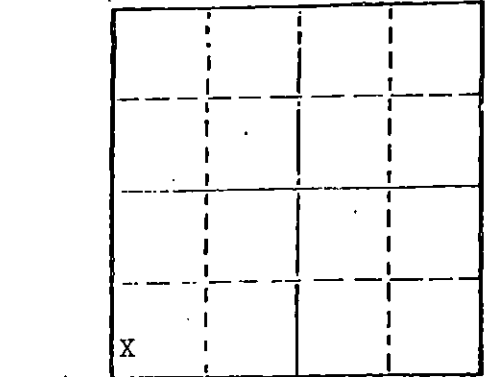

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Clarence Thomas

Producing formation Morrow Depth to top 6156 Bottom 6182 Total Depth of Well 8243

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Ft. Riley		2820	2875	13-5/8"	2495	902
Lansing		4408	4460	5-1/2" 9-5/8"	6190	2745
Morrow Sand		6156	6182			
Simpson Sand		7965	7980			
Arbuckle Lime		8013	8043			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set CIBP at 6125' with 2 sacks of cement. Shot pipe at 3200'. Shot again at 2887'. Shot again at 2745'. Pumped 45 sacks of cement from 2715' to 2615', pulled 5-1/2 casing. Set CIBP in 9-5/8" casing at 2480. Set CIBP in 9-5/8" casing at 2410' with 2 sacks of cement from 870' to 770'. Pumped 120 sacks of cement from 700' to 600'. Pulled 9-5/8" casing. Put 50 sacks of cement from 50' to 6'. Cut off 9-5/8" below ground level.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Midwest Casing Pullers

STATE OF Kansas COUNTY OF Seward, ss.

R. C. Carlson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
P.O. Box 432 Liberal, KS 67901
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of July, 1982



[Signature] V. K. Bruce
Notary Public.

