

15-175-20213-0000


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Seward County, Sec. 6 Twp. 35S Rge. (E) 33 (W)  
Location as "NE/CNW/SW" or footage from lines 1320' SNL & 1620' EWL  
Lease Owner Northern Pump Company  
Lease Name Liberal Airport Well No. 5  
Office Address P.O. Box 937, Garden City, Kansas 67846  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 11-26 19 73  
Application for plugging filed Consent of Ed Eves 11-26 19 73  
Application for plugging approved 19  
Plugging commenced 7:00 AM 11-26 19 73  
Plugging completed 1:00 PM 11-26 19 73  
Reason for abandonment of well or producing formation \_\_\_\_\_

NORTH

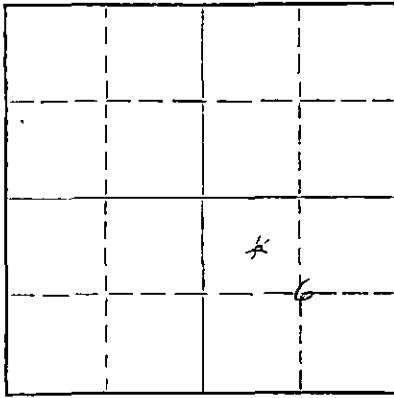

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? \_\_\_\_\_

Name of Conservation Agent who supervised plugging of this well \_\_\_\_\_  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_ Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	1840	8-5/8"	1840'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud to 1100 ft.

Set first plug from 1100' to 1000' with 35 sacks common cement. Filled hole with heavy mud to 45'. Set second plug from 45' to 0' with 15 sacks common cement. Job completed at 1:00 PM

SERVICE REPORT # 03-13-0573 Attached

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 5 1973  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Zenith Drilling Corporation, Inc.  
Address 200 W. Douglas, Wichita, Kansas 67202


STATE OF Kansas, COUNTY OF Finney, ss.  
Austin Brady (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Austin Brady  
Austin Brady P.O. Box 937, Garden City, Ks.  
(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of December, 19 73

My commission expires October 26, 1976

Iola L. Upchurch Notary Public.



# WELL LOG

COMPANY Northern Pump

SEC. 6-35-33W

FARM Liberal Airport

NO. 5

LOC. NW/4

TOTAL DEPTH 6805'

COUNTY Seward


COMM. 11/4/73

COMPL 11/26/73

CONTRACTOR Zenith Drilling Corporation

CASING

8 5/8" @ 1840' W/900 sx.



ELEVATION

PRODUCTION D & A

FIGURES INDICATE BOTTOM OF FORMATIONS

0 - 670'	Sand
670 - 1075	Red Bed
1075' - 1220'	Sand
1220 - 1690'	Red bed & Anhy.
1690 - 1815'	Redbed
1815 - 2478'	Anhy.
2478 - 2834'	Shale & Lime
2834 - 3693'	Lime & Shale
3693 - 4085'	Dolo.
4085 - 4450'	Lime & Shale
4450 - 4562'	Shale W/Lime streaks
4562 - 4605	Shale - Lime
4605 - 4905	Lime - Shale
4905 - 5115	Lime
5115 - 6085	Lime & Shale
6085 - 6578	Shale & Lime
6578 - 6805 TD	Shale

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 5 1974  
CONSERVATION DIVISION  
Wichita, Kansas

State of Kansas }  
County of Sedgwick } ss

I, C. Robert Buford of Zenith Drilling Corporation, Inc.

upon oath state the above and foregoing is a true and correct copy of the log of the Liberal Airport #5 well.

C. Robert Buford  
C. Robert Buford - President

Subscribed and sworn to before me this 3 day of December, 1973.

My Commission Expires: Aug 15, 1975

Myrna D. Murphy  
NOTARY PUBLIC  
Myrna D. Murphy