

15-175-20201-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

P. O. Box 17027
Wichita, Kansas 67217
NORTH

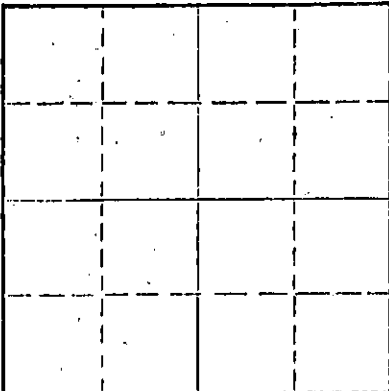

Locate well correctly on above
Section Plat

Seward County, Sec. 15 Twp. 35S. Rge. (E) 31 (W)
Location as "NE/CNW&SW" or footage from lines C NE NE
Lease Owner Hickerson Oil Company
Lease Name Larrabee Well No. 1
Office Address 2420 Western Federal Savings Bldg., Denver
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 2, 19 73
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced July 2, 19 73
Plugging completed July 2, 19 73
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes (Edgar Eves of Sublette)

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well 6360 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface Casing	0	1505'	8-5/8"	1505'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy Mud from Total Depth to 1000 Feet;
from 1000 Feet to 900 Feet, 35 sax Cement Plug; Mud to 45 Feet, Plug, Halls and 15 sax Cement to Base of Cellar; 2 sax Cement in Rat Hole. Job completed @ 8:00 P.M.

RECEIVED
STATE CORPORATION COMMISSION
JUL 9 1973
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Halliburton
Address Box 129, Liberal, Kansas 67901

STATE OF KANSAS COUNTY OF SEDGWICK
Clarence Michael of Sage Drilling Co., ss.

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) Clarence Michael
500 Bitting Bldg., Wichita, Kansas
(Address)



Subscribed and Sworn to before me this 5th day of July 19 73.

Louise K. Whitted
Louise K. Whitted, Notary Public.

My commission expires November 26, 1974.

RECEIVED
STATE CORPORATION COMMISSION
JUL 9 1973
CONSERVATION DIVISION
Wichita, Kansas

DRILLERS LOG

LARRABEE NO. 1


CASING RECORD:	OPERATOR: Hickerson Oil Co.	DESCRIPTION:
8-5/8" @ 1505' w/600 sax cement	CONTRACTOR: Sage Drilling Co.	NE NE Sec. 15-35S-31W Seward County, Kansas.
TOTAL DEPTH: 6350'	COMMENCED: June 19, 1973	
	COMPLETED: July 2, 1973	

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface Soil & Sand	0	735	
Shale, Sand & Anhydrite	735	1508	
Shale & Anhydrite	1508	1968	
Shale	1968	2401	
Lime & Shale	2401	6360'	D&A

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SAGE DRILLING CO., INC.

By Clarence Michael
Clarence Michael



Subscribed and sworn to before me this 3rd day of July, 1973.

Louise K. Whitted
Louise K. Whitted, Notary Public

My commission expires:
November 26, 1974.