

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

MEADE County. Sec. 4 Twp. 34 Rge. 30 (E) (W)

Location as "NE/CNW/SW" or footage from lines NW NW

Lease Owner R. W. LANGE

Lease Name SCHELL Well No. 1

Office Address P. O. BOX 1034 - GARDEN CITY, KANSAS

Character of Well (completed as Oil, Gas or Dry Hole) GAS

Date well completed 19 65

Application for plugging filed AUGUST 26 19 65

Application for plugging approved 19 65


Plugging commenced SEPTEMBER 3 19 65

Plugging completed SEPTEMBER 24 19 65

Reason for abandonment of well or producing formation DEPLETED

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES



Name of Conservation Agent who supervised plugging of this well MR. HUGH SCOTT

Producing formation Depth to top Bottom Total Depth of Well 5931' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1475'	NONE
				5 1/2"	5930'	3050.53'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

5930' - 5770' - PUMPED 20 SACKS CEMENT
5770' - 705' - MUD
705' - 600' - PUMPED 35 SACKS CEMENT
600' - 45' - MUD
45' - BASE - PUMPED 15 SACKS CEMENT

RECEIVED
STATE CORPORATION COMMISSION

OCT 20 1965

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor SANTA-FE PIPE & SUPPLY, INC.

Address P. O. BOX 562 - GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.

T. L. NUTT (employee of owner) or owner of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein-contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) T. L. Nutt


P. O. BOX 562 - GREAT BEND, KANSAS

(Address)

SUBSCRIBED AND SWORN to before me this 6th day of October 19 65

Mary M. Guesnier
Notary Public.

My commission expires July 31, 1966

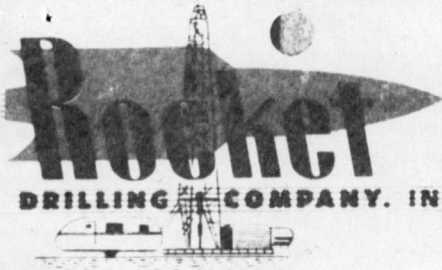

Forest 3-1279 - 352 N. BROADWAY - WICHITA, KANSAS

15-119-00035-0000

James Donoghue
 #1 Schell
 C NW/4 NW/4 Sec. 4-34S-30W
 Meade County, Kansas

Mr. James Donoghue
 Denver Club Building
 Denver, Colorado

Elevation: 2700 ft.
 Spudded: February 20, 1956
 Rotary Completed: March 20, 1956
 Contractor: Rocket Drilling Company, Inc.

CASING RECORD

1175: 3-5/8" O.D. 2 1/2# seamless casing cemented with 750 sacks cement.
 5930: 5-1/2" O.D. 1 1/2# seamless casing cemented with 250 sacks cement.

DRILLERS LOG

Clay & Sand	0 to 40	Shale & Lime	2703
Sandy Clay	250	Lime & Shale	3082
Shale & Shells	270	Lime	3201
Sand	330	Lime & Shale	3327
Shale & Shells	400	Shale	3336
Sand	450	Lime & Shale	3505
Shale & Shells	500	Shale & Chalk	3591
Red Bed, Sand streaks	615	Shale & Lime & Chalk	3664
Anhydrite & Shale	705	Lime & Shale	3807
Shale & Shells	1005	Lime	3893
Sand	1225	Shale	3980
Shale & Shells	1050	Shale & Lime streaks	4089
Sand	1100	Shale & Lime	4213
Shale & Shells	1220	Lime & Shale	4500
Red Bed & Anhydrite	1465	Lime	4546
Anhydrite & Shale	1475	Lime & Shale	4605
Sand	1510	Lime	5199
Gray Sand	1820	Lime & Shale	5242
Red Bed	2055	Lime	5700
Shale	2275	Lime & Shale	5731
Lime streaks	2490	Lime	5931
Lime & Shale	2614		

RECEIVED
 STATE CORPORATION COMMISSION

OCT 20 1985

CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
 COUNTY OF SEDGWICK) ss

Subscribed and sworn to before me, a Notary Public, in and for the County and State aforesaid, this 29th day of March, 1956.

James L. Melzer
 Notary Public