


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

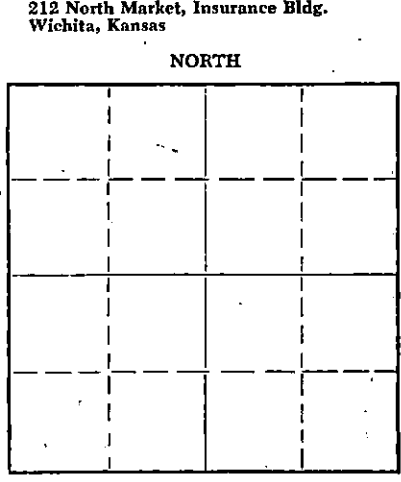

Meade County, Sec. 22 Twp. 34 Rge. 30 (E) (W)
Location as "NE/CNW/SW" or footage from lines G St N
Lease Owner O. F. Herbert
Lease Name Schelle Well No. # 1
Office Address P. O. Box 831 Liberal, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed yes 19
Application for plugging approved yes 19
Plugging commenced 4-13-61 19
Plugging completed 4-19-61 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W. L. Lac Kamp
Producing formation Depth to top Bottom Total Depth of Well PB 5980' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				1 1/2"		2,802'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugging commenced 4-13-61. Plugging completed 4-19-61.
Measured in to total depth: Plug at 5980'.
Plugged off bottom: Sanded back to 5950' and dumped 4 sacks of cement.
Worked and shot casing. Shot & worked 1 1/2" casing free at 2,802'.
Built rack and slide. Pulled and layed down casing.
Plugged well: Mudded hole up to 550' and set 10' rock bridge at 550'.
Mixed and dumped 20 sacks of cement. Mudded up to 30' and set 10' rock bridge at 30'. Mixed and capped the well with 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
6-15-61
JUN 15 1961

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor J. O. Forbes d/b/a Forbes Casing Pulling Company Wichita, Kansas
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) J. O. Forbes
Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 20th day of April, 1961
Raymond Jenkins Notary Public.
My commission expires December 8th, 1963

15-49-10240-0001
WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

508 East Murdock,

Wichita, Kansas

COPY

Company. ROY FURR
Farm. Schelle

No. 1

SEC. 22 T. 34 R. 30W
C SW NW

Total Depth. 6139'

Comm. 11-25-58

Comp. 12-5-58


Shot or Treated.

Contractor. Midwestern Drillers

Issued. 7-15-61

County Meade

KANSAS



CASING:
8" 1460'

Elevation. 2687' RB

Production. Dry

Figures Indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE:

TOPS: SCOUT	
Council Grove	3122
Toronto	4494
Marmaton	5288
Cherokee	5482
Morrow	5845
Mississippi	5947
Total Depth	6139

RECEIVED
STATE CORPORATION COMMISSION

JUL 16 1964

CONSERVATION DIVISION
Wichita, Kansas