

15-119-20059-0000


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

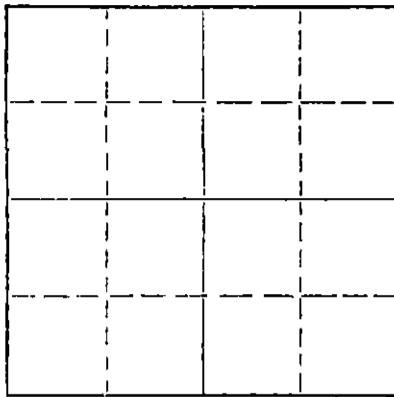

Locate well correctly on above  
Section Plat

Meade County, Sec. 20 Twp. 34S Rge. 30W (E) (W)  
Location as "NE/CNW/SW" or footage from lines C SW-SW  
Lease Owner Allen & Parker  
Lease Name Holmes Well No. 1  
Office Address Box 906, Perryton, Texas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 10-12 1970  
Application for plugging filed 19  
Application for plugging approved 10-12 1970  
Plugging commenced 10-12 1970  
Plugging completed 10-12 1970  
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ed Eves @ Sublette, Kansas  
Producing formation Depth to top Bottom Total Depth of Well 4550 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Ogalda	fresh water	-	400 est	8 5/8	1313	None
Permian Carbonates	Salt Water	2550	3710			
Toronto	Salt water	4343	4405			
Lansing	Salt water	4460	4570 T.D.			

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 29 1970  
CONSERVATION DIVISION  
WICHITA, KANSAS

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Layed down drill collars and drill pipe except for 11 triple stands (33 joints) 1007 feet. Run this pipe in hole and loaded hole with 9.7 lbs Drilling Mud. Rigged Halliburton and mixed and spotted 35 sacks common cement and pumped down drill pipe and displaced cement with mud. Pulled out and layed down drill pipe and filled hole with mud up to 45 feet. Pushed Halliburton 8 5/8 plug down with Kelly to 44 feet. Mixed 15 sacks common cement by Halliburton and pumped in 8 5/8. Filled up to 4 feet below ground level. Dug out well head and cut 8 5/8" off 4" below G.L. and welded cap on 8 5/8" casing.  
Cemented plugs from: 1007' up to 892'  
44' up to 4' below ground level  
Welded cap on 8 5/8"

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton  
Address Liberal, Kansas

STATE OF Texas, COUNTY OF Ochiltree, ss.  
Bill Hair (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill Hair  
Box 906, Perryton, Texas 79070  
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of October, 1970

My commission expires June 1, 1971  
Vicki S. Miller Notary Public.