

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Morton County, Sec. 22 Twp. 34S Rge. 43 ~~XX~~ (W)

Location as "NE/CNW/SW" or footage from lines 500' S SW/4 NE/4

Lease Owner Evans & Trigg

Lease Name Interstate Well No. 1-22

Office Address 410 Woolworth Building, Boulder, Colorado 80302

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 1-22 1971

Application for plugging filed 1-21 1971

Application for plugging approved 1-22 1971


Plugging commenced 1-22 1971

Plugging completed 1-22 1971

Reason for abandonment of well or producing formation Non commercial

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

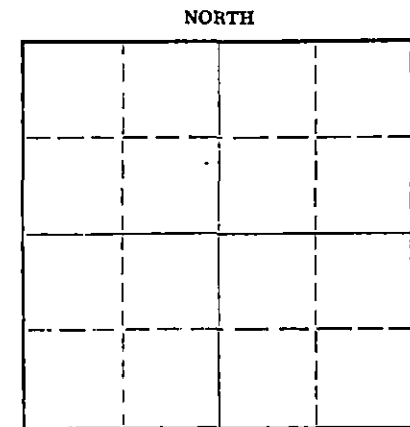

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. E. Eves

Producing formation none Depth to top Bottom Total Depth of Well 4888 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Dakota	water			8 5/8"	1169'	none
U. Morrow Sandstone	water & gas	4232	4276	5 1/2"	4887'	1537'
Miss. St. Louis	water	4813	4842			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set cast iron bridge plug at 3980' inside 5 1/2" casing. Pulled 1537' 5 1/2" casing. Ran tubing and placed 35 sack cement plug from 1100' to 1200' and 35 sack cement plug from top of surface pipe to 100'. Surface marker placed in top of surface pipe.

RECEIVED
STATE CORPORATION COMMISSION
JAN 27 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Patrick Well Servicing Company

Address Liberal, Kansas

STATE OF Colorado, COUNTY OF Boulder, ss.

Jack E. Trigg (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack E. Trigg

410 Woolworth Bldg. Boulder, Colorado

(Address)

SUBSCRIBED AND SWORN TO before me this 25th day of January, 1971

My commission expires 12-5-73

Notary Public.