



State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

P.O. Box 17027 3830 S. Meridian  
WICHITA, KANSAS 67217

VERBAL PERMIT FORM  
(To Be Filed By Plugging Agent)

RECEIVED  
STATE CORPORATION COMMISSION

JUN 12 1974

CONSERVATION DIVISION  
Wichita, Kansas

J. Lewis Brock  
Administrator  
500 Insurance Building  
Wichita, Kansas 67202

Dear Sir:

Mr. Evers of Pet Inc. has this

date requested permission to plug the following described well:

Mr. Evers guarantees payment of the plugging fee.

Operator's full Name: Petroleum Inc.

Complete Address: Box 1255, Liberal, Kansas

Lease Name: Warden Well No. 1

Location: 200' E C NE NE Sec. 25 Twp. 34 Rge. 33 (E)(W)

County: Seward Total Depth 6436' Oil Well X

Gas Well      Input Well      SWD Well      D & A      Lost Hole     

Mr. Evers was instructed to plug the well as follows:

8 5/8" to 1572' circulated w/ cement. 5 1/2" to 6432' cemented.

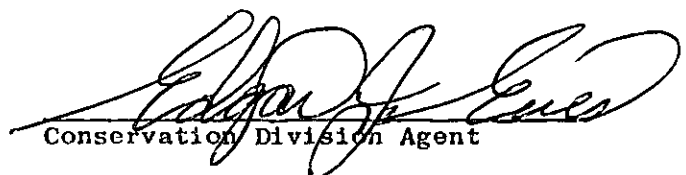
Top perforations 6323' Plug bottom w/ 20 sacks cement.

Top of cement 6223' Mud 6223' to 900'

Spot 35 sacks cement 900' to 800' Mud 800' to 45'

Plug, Hulls & 15 sacks cement 45' to 0'.

Very truly yours,

  
Conservation Division Agent