15-129-00157-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

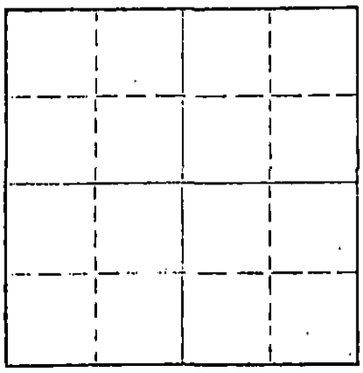

Locate well correctly on above Section Plat

Morton County. Sec. 36 Twp. 33 Rge. 40 (E) (W)

Location as "NE/CNW¼SW¼" or footage from lines C NE NE

Lease Owner Anadarko Production Company

Lease Name Withroder "A" Well No. 2

Office Address Box 351, Liberal, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 4-10 19 64

Application for plugging filed 3-26 19 64

Application for plugging approved 3-27 19 64

Plugging commenced 4-10 19 64

Plugging completed 4-10 19 64

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott

Producing formation Depth to top Bottom Total Depth of Well 6457 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS — CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	1692	None
				4 1/2	3057	2317

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Spotted 35 sxs cmt. @ 2650' Spotted 25 sxs @ 700' and 15 sxs 40'

RECEIVED
STATE CORPORATION COMMISSION

APR 17 1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sargent's Casing Pulling Service

Address 121 West 9th Liberal, Kansas

STATE OF Kansas, COUNTY OF Seward, ss.

S. H. Neithercoat (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) S H Neithercoat

Box 351, Liberal, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of April, 19 64

Donald L. Vangieson
Notary Public.

My commission expires

MY COMMISSION EXPIRES SEPT. 20, 1964

15-129-00157-0000

GR

DRILLER'S LOG

WELL NAME Withroder "A" # 2

COMPANY OPERATING Anadarko Production Company
ADDRESS of COMPANY Box 351, Liberal, Kansas

WELL LOCATION C ¼ NE ¼ NE ¼,
1980 ft. North of South line,
1980 ft. East of West line; Sec. 36 Twp. 33 Rge. 40, Morton County, Kansas

DRILLING STARTED 2-24, 1964 DRILLING COMPLETED 3-16, 1964
WELL COMPLETED 4-10, 1964 WELL CONNECTED , 19

ELEVATION 3277.75 ft. Ground Level CHARACTER OF WELL (Oil, Gas, or Dry Hole) Dry Hole

OIL OR GAS SANDS OR ZONES - PERFORATIONS - ACIDIZING AND FRACTURING INFORMATION

Name	From	To	No. of Shots	Gallons Used	Kind Used
Council Grove	2985	2992	28	500	15% reg.
Council Grove	2939	2942	12	500	15% reg.
Council Grove	2925	2927	8	3000	15% reg.
Council Grove	2910	2913	12	3000	15% reg.
Council Grove	2890	2893	12	3000	15% reg.

CASING RECORD

Size	Amount Set	Sacks of Cement	Amount Pulled
8 5/8	1692	825	None
4 1/2	3057	250	2317

FORMATION RECORD

Formation	Top	Bottom	Formation	Top	Bottom
Surface Sand & Clay	0000	205	Lime	6165	6263
Sand & Red Bed	205	805	Shale & Lime	6263	6457
Sand & Gypsum	805	1405	Total Depth	6457	
Shale & Shells	1405	1691			
Anhydrite	1691	1693			
Shale & Lime	1693	4300			
Lime	4300	4340			
Shale & Lime	4340	4904			
Lime	4904	4987			
Shale & Lime	4987	5427			
Shale	5427	5678			
Shale & Lime	5678	6165			

RECEIVED
STATE CORPORATION COMMISSION

RESULTS of INITIAL PRODUCTION TEST:

APR 17 1964

CONSERVATION DIVISION
Wichita, Kansas