


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission
245 North Water
Wichita, KS 67202

FORM CP-4

WELL PLUGGING RECORD

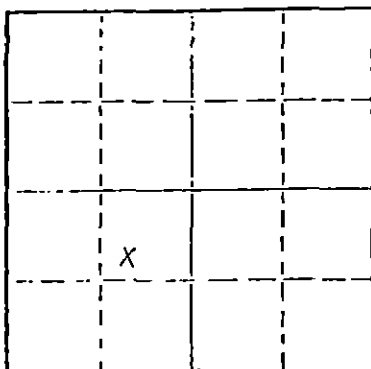

Locate well correctly on above
Section Plot

Sumner County, Sec. 7 Twp. 35S Rge. (E) 2 (W)
Location as "NE/CNW/SE/SW" or footage from lines SW NE SW
Lease Owner. Petroleum Resources Company
Lease Name. Fichter Well No. 1
Office Address. P. O. Box 631, Cushing, OK 74023
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 7-30 1979
Application for plugging filed 7-30 1979
Application for plugging approved 7-30 1979
Plugging commenced 7-30 1979
Plugging completed 7-30 1979
Reason for abandonment of well or producing formation No oil or gas encountered

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well William T. Owen, P. O. Box 369, Pratt, KS 67124
Producing formation Depth to top Bottom Total Depth of Well 4782 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	shale	surface	253 (KB)	8-5/8"	250'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Cement plug from 295-185', 40 sacks
Cement plug from 40'-surface, 12 sacks
Cement plug in rat hole, 3 sacks

RECEIVED
STATE CORPORATION COMMISSION
8-13-79
AUG 15 1979
CONSERVATION DIVISION
Wichita Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Gabbert-Jones, Inc.
Address 830 Sutton Place, Wichita, KS 67202

STATE OF Oklahoma COUNTY OF Payne ss.
R. H. Burrage

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

R. H. Burrage

P. O. Box 631, Cushing, OK 74023

(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of August 1979

My commission expires March 20, 1982

Sharon Baker

Notary Public.

15-191-20918-0000

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

Fichter #1
SW-NE-SW Sec 7-35S-2W
Sumner County Kansas

Commenced: 7-17-79

Completed: 7-30-79

OPERATOR: Petroleum Resources Co.

Depth		Formation	Remarks
From	To		
0	260	Redbed-Shale	Ran 12 jts of 28" 8 5/8" csg set @ 258' Cemented w/ 225-sks Common 2% Gel 3% CC PD @ Midnight 7-17-79
260	730	Shale	
730	970	Shale-Shells	
970	2075	Shale	
2075	2265	Shale-Lime	
2265	2585	Shale	
2585	2765	Shale-Lime	
2765	3105	Shale	
3105	3340	Shale-Sand	
3340	3465	Shale-Lime	
3465	3635	Lime-Shale	DRY & ABANDONED
3635	4310	Lime	
4310	4410	Shale	
4410	4458	Shale-Lime	
4458	4500	Lime-Shale	
4500	4750	Lime	
4750	4782	Lime-Sand	
4782	4782 - TD		

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)


I, the undersigned, being duly sworn on oath, state that the above
Drillers' Well Log is true and correct to the best of my knowledge and belief and
according to the records of this office.

GABBERT-JONES, INC.

James S. Sutton II
JAMES S. SUTTON II

Subscribed and sworn to before me this 31st day of July, 1979.

Elizabeth J. Edwards
ELIZABETH J. EDWARDS-NOTARY PUBLIC



RECEIVED
STATE CORPORATION COMMISSION

AUG 13 1979

CONSERVATION DIVISION
Wichita, Kansas