

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Sumner County. Sec. 18 Twp. 30 Rge. 2 (E) W (W)

Location as "NE/CNWxSWx" or footage from lines C SW NE

Lease Owner Shawver-Armour Inc.

Lease Name Lucas Well No. 1

Office Address 817 Central Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed 11-25 19 67

Application for plugging filed 11-25 19 67

Application for plugging approved 11-25 19 67


Plugging commenced 11-25 19 67

Plugging completed 11-25 19 67

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

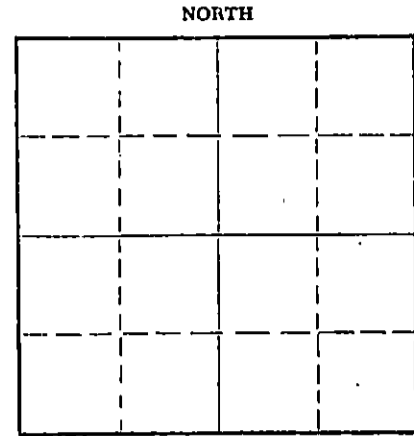

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Howard Hess

Producing formation Depth to top Bottom Total Depth of Well 3285 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	258'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole filled with heavy rotary mud to 275'.  
Bridge at 275' with hulls and 20 sacks  
cement. Hole filled with mud to 40'.  
Bridge at 40' with hulls and 8 sacks  
cement. Rathole capped with 2 sacks  
cement.

RECEIVED  
STATE CORPORATION COMMISSION

DEC 1 1967

CONSERVATION DIVISION  
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor White & Ellis Drilling, Inc. License #209  
Address Box 448, El Dorado, Kansas 67042

STATE OF Kansas, COUNTY OF Butler, ss.  
Ernest Sifford, employee of contractor of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ernest Sifford  
Box 448, El Dorado, Kansas  
(Address)

Subscribed and sworn to before me this 29th day of November, 19 67



September 26, 1968

Notary Public.

15-191-20052-0000  
CP

CASING RECORD

8 5/8

258' Cemented  
w/160 sacks

Location: C SW NE  
Section: 18-30-2W  
Summer County, Kansas  
Farm: Lucas #1  
Well Owner: Shawver-Armour Inc.  
Contractor: WHITE & ELLIS DRILLING,  
INC.  
Commenced: 11-18-67  
Completed: 11-25-67

T. D.

3285'

KELLY BUSHING MEASUREMENT 5' ABOVE GROUND LEVEL.

<u>FORMATION</u>	<u>DEPTH</u>
Shale & Shells	1-185
Shale	258
Shale & Salt	475
Shale & Anhy.	755
Lime & Shale	1285
Shale & Lime stks.	1750
Shale & Lime	2015
Lime & Shale	2570
Shale & Sand stks.	2770
Shale	2809
Sand	2910
Shale sandy	3000
Shale	3108
Lime	3285

TOP S

Stainaker	2809	Dry Hole, Plugged
Kansas City	3108	& Abandoned