


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

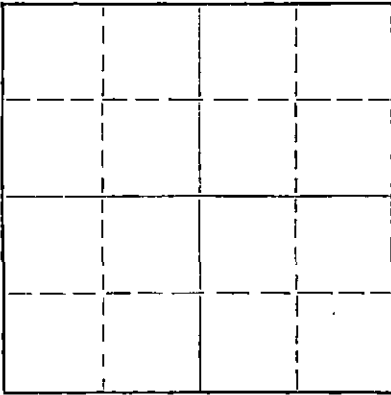

Locate well correctly on above
Section Plat

Sedgwick

County. Sec. 12 Twp. 29 Rge. 1W (E) (W)Location as "NE/CNW/SW" or footage from lines. NW SW SELease Owner George P. VyeLease Name RexWell No. 1Office Address 1006 Central Building, Wichita, KansasCharacter of Well (completed as Oil, Gas or Dry Hole) Dry HoleDate well completed January 1 19 57Application for plugging filed January 1 19 57Application for plugging approved January 1 19 57Plugging commenced January 1 19 57Plugging completed January 1 19 57Reason for abandonment of well or producing formation oil in commercial quantities not foundIf a producing well is abandoned, date of last production 19Was permission obtained from the Conservation Division or its agents before plugging was commenced? yesName of Conservation Agent who supervised plugging of this well Ruel DurkeeProducing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3357 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	264'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole from total depth to 260' with extra heavy rotary mud. Set Plug #1 at 260' with 15 sacks cement. Filled hole with extra heavy rotary mud and set Plug #2 on top with five sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

JAN 5 1957

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Prime Drilling CompanyAddress 814-16 Union Center, Wichita, KansasSTATE OF KANSAS, COUNTY OF Sedgwick, ss.

R. R. McNicol (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature)

RR McNicol814-16 Union Center, Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of January, 19 57Darlene May

Notary Public.

My commission expires September 30, 1959

ROTARY DRILLING LOG

OPERATOR: George P. Vye
 Rex No. 1
 NW SW SE Sec. 12-29-1W,
 Sedgwick County, Kansas

CONTRACTOR: Prime Drilling Company
 COMM: 12/20/56
 COMP: 1/1/57

Remarks: Set 8-5/8" surface casing
 at 264' cemented with 200 sacks Pozmix,
 2% C.C.


Formations:

Soil & Clay	30'
Sand & Gravel	52'
Shale	85'
Sand	95'
Shale	200'
Shale & Shell	265'
Lime	300'
Shale & Lime	620'
Lime	880'
Lime & Shale	1775'
Lime	2110'
Lime & Shale	2485'
Sand	2530'
Lime	2680'
Shale	2740'
Lime	2890'
Lime & Shale	2950'
Lime	3090'
Lime & Shale	3290'
Lime	3300'
Lime & Chert	3323'
Lime	3325'
Cherty Lime	3357'
Rotary Total Depth (D&A)	3357'

We certify the above log is true and
 correct to the best of our knowledge
 and belief.

PRIME DRILLING COMPANY

R. R. McNicol
 R. R. McNicol

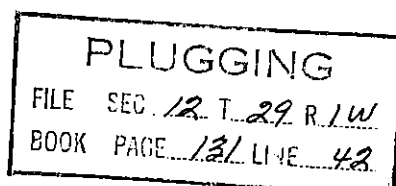

RECEIVED
 STATE CORPORATION

JAN 5 1957

CONSERVATION DIVISION
 Wichita, Kansas