
Form CP-3 Rev. 6-26-62

KANSAS STATE CORPORATION COMMISSION

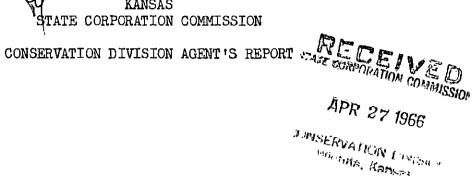

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

INVOICED

DATE 4/27/66 INV. NO. 3/19-W

Operator's Full Name Horizon Oil & Gas Company
Complete Address: Box 7, Spearman, Texas
Lease Name Collingwood Well No. 1-21
Location C E/2 SE Sec. 21 Twp. 32 Rge. 30 (X) (W)
County Meade Total Depth 6065!
Abandoned Oil Well X Gas Well Input Well SWD Well D & A X
Other well as hereafter indicated: None
Plugging Contractor: Daco Lease & Well serviceing Co.
Address: Borger, Texas License No. 138
Operation Completed: Hour 2:00PM Day 25 Month 4 Year 1966
The Above well was plugged as follows:
8 5/8" to 1428' Cirulated w/ cement. 4 1/2" to 6065' cemented.
Top Perforations 5955' Plug bottom w/ 20 sacks cement
Top of cement 5780' Mud 5780' to 700'
Spotted 35 sacks cement 700' to 600' Mud 600' to 45'
Plug, Hulls & 15 sacks cement 45' to 0'. Company Pump.
Pulled 3018' of 4 1/2" Casing.
,
I hereby certify that the above well was plugged as herein stated.