

15-173-01441-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

R

Sedgwick County. Sec 29 Twp. 22 Rge. 1W (E) (W)

Location as "NE/CNW/SW" or footage from lines NW SE SW

Lease Owner Tomlinson & Kathol

Lease Name McQuillan Well No. 1

Office Address 1125 Wichita Plaza, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) D & A

Date well completed 3/28/1964

Application for plugging filed 3/28/1964

Application for plugging approved 3/28/1964


Plugging commenced 3/28/1964

Plugging completed 3/28/1964

Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

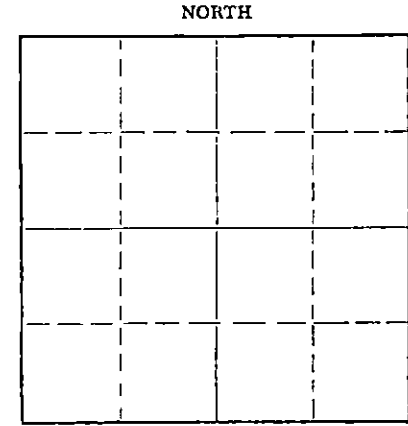

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Turpin

Producing formation None Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3815 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface	Water	Surface	344'	8-5/8"	344'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Heavy mud was put into the hole to a depth of 200 feet where bottom plug was set and cemented with 15 sacks cement. Mud was again put into the hole to a depth of 30 feet where the top plug was set and cemented with 8 sacks cement. Rat hole was plugged with 2 sacks cement. Surface casing was cut off below ground level and the location abandoned.

RECEIVED  
STATE CORPORATION COMMISSION

APR 2 1964

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Tomlinson & Kathol  
Address 1125 Wichita Plaza, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Richard C. Davis (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
1125 Wichita Plaza, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 1st day of April, 1964

[Signature]  
Notary Public.

My commission expires 1/19/65



DRILLERS LOG  
TOMLINSON & KATHOL  
# 1 McQUILLAN  
NW SE SW, SEC. 27-29S-1W  
SEDGWICK COUNTY, KANSAS

Contractor - Tomlinson & Kathol

Commenced: 3/17/64  
Completed: 3/28/64  
Elevation: 1273 KB

<u>From</u>	<u>To</u>	<u>Description</u>	<u>Remarks</u>
0	230	Surface Hole	
230	275	Shale	
275	320	Sand	
320	344	Shale	346' 8-5/8" Surf. Csg. w/225 Sacks Cement
344	410	Shale w/Lime	
410	946	Lime	
946	1535	Lime & Shale	
1535	1960	Shale	
1960	2145	Lime & Shale	
2145	2895	Shale	
2895	2985	Shale & Lime	
2985	3086	Lime	
3086	3173	Lime & Shale	
3173	3240	Shale & Lime	
3240	3490	Lime	
3490	3597	Chert	
3597	3810	Lime	
3815		Rotary Total Depth	

RECEIVED  
STATE CORPORATION COMMISSION  
APR 2 1964  
CONSERVATION DIVISION  
Wichita, Kansas


Stalnaker	2505
Kansas City	2833
Base K.C.	3041
Mississippian	3391
Kinderhook	3750
Simpson	3807

I certify to the best of my knowledge and belief, the above represents a true and accurate driller's log record of the captioned well.

  
Richard C. Davis

STATE OF KANSAS  
SS  
COUNTY OF SEDGWICK

Subscribed and sworn to before me this 1st day of April, 1964.

  
Esther Lamone, Notary Public

My Commission Expires: 1/19/65