

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-189-21524-00-00
Spot: SWSWSW Sec/Twnshp/Rge: 25-33S-36W
250 feet from S Section Line, 250 feet from E Section Line
Lease/Unit Name: NIX OBSERVATION Well Number: 1
County: STEVENS Total Vertical Depth: 2855 feet

Operator License No.: 5208
Op Name: EXXONMOBIL OIL CORP
Address: PO BOX 4358
HOUSTON, TX 77210

Production Casing Size: 8.625 feet: 2579 WITH 1160 SX CMT
Surface Casing Size: 13.375 feet: 728 UNKNOWN

\$92.79

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 04/07/2003 1:30 PM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: PUMP 500# & 25 SX CMT FOR BOTTOM PLUG. PLUG AT 1750' WITH 50 SX CMT. PLUG AT 800' WITH 40 SX CMT. PLUG AT 40-0' WITH 10 SX CMT.

Plugging Proposal Received By: JIM HOLLAND WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 04/07/2003 3:30 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:


PBTD 2854'. PERFS AT 2820-28, 2757-75, 2672-2724, 2643-47'. PUMPED DOWN 8 5/8" CASING 500# HULLS WITH 25 SX CMT. LOAD HOLE WITH MUD. 1ST PLUG RUN TUBING IN HOLE TO 1750' & PUMPED 50 SX CMT. 2ND PLUG PULLED TUBING OUT OF HOLE TO 800' & PUMPED 40 SX CMT. 3RD PLUG PUMPED 10 SX CMT FROM 40' TO 0'. PUMPED DOWN 13 3/8" X 8 5/8' ANNULUS. CMT AT SURFACE.

RECEIVED
APR 18 2003
KCC WICHITA

Remarks: USED COMMON CEMENT BY SARGENTS. NO CASING RECOVERED.

Plugged through: TBG

District: 01

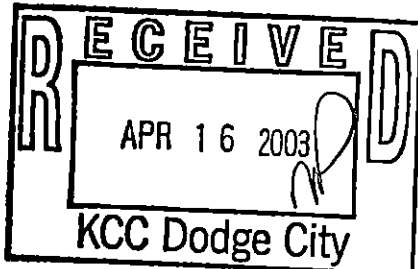

Signed _____

Kevin D. Smith

(TECHNICIAN)

INVOICED

DATE 4-21-03

INV NO 2003061426

Form CP-28