

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

15-29-10166-0000

Morton

County, Sec. 5 Twp. 31S Rge. 42 (E) (W)

Location as "NE/CNW/SW" or footage from lines C NE 1/4

Lease Owner The Superior Oil Company

Lease Name Hume Unit Well No. 1

Office Address P. O. Box 200, Casper, Wyoming 82601

Character of Well (completed as Oil, Gas or Dry Hole) Gas

Date well completed June 10 19 55

Application for plugging filed January 21 19 71

Application for plugging approved January 25 19 71


Plugging commenced April 5 19 71

Plugging completed April 8 19 71

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production February 11 19 71

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

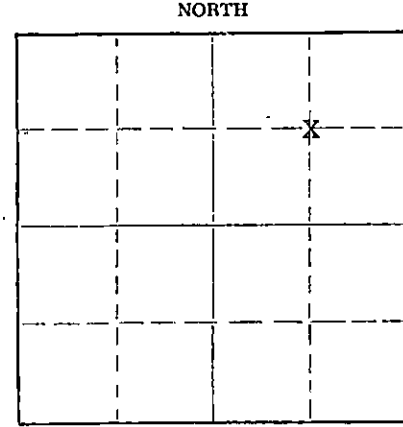

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Eves

Producing formation Morrow Depth to top 5237 Bottom 5287 Total Depth of Well 5331 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Morrow	Gas	5237	5287	10-3/4"	1531	0
				7"	5331	3032'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Mixed 25 sacks regular cement with 2 sacks cotton seed hulls. Pumped down casing and spotted from 5100 to 5287'. Shot 7" casing - pulled and recovered 3032' (94 jts.)  
Mixed 60 sacks regular cement and spotted from 700 to 800'. Filled hole with mud.  
Mixed 20 sacks cement and spotted from 40' to surface. Cut off surface pipe 3' below ground level and welded on cap.

RECEIVED  
STATE CORPORATION COMMISSION  
APR 20 1971  
CONSERVATION DIVISION  
Wichita, Kansas  
4-20-71

Name of Plugging Contractor Sargent Casing Pullers  
Address P. O. Box 506, Liberal, Kansas

STATE OF Wyoming, COUNTY OF Natrona, ss.  
Herman High (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Herman High District Engineer

P. O. Box 200, Casper, Wyoming 82601 (Address)

SUBSCRIBED AND SWORN to before me this 19th day of April 19 71

My commission expires August 21, 1971

Jeanette H. Parke Notary Public

