

STATE OF KANSAS
STATE CORPORATION COMMISSION

15-175-00544-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Seward County, Sec. 35 Twp. 31S Rge. 33 2/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
1980' FSL and 650' FWL

Lease Owner Amoco Production Company
Lease Name Leroy Lambert Well No. 1
Office Address P. O. Box 432 Liberal, KS 67901
Character of Well (Completed as Oil, Gas or Dry Hole) Oil


Date Well completed 6-7 1962
Application for plugging filed 5-7 1982
Application for plugging approved 6-1 1982
Plugging commenced 7-14 1982
Plugging completed 7-19 1982

Reason for abandonment of well or producing formation Depletion

If a producing well is abandoned, date of last production
January 1970

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Paul Luthi
Producing formation Des Moines Depth to top 4931 Bottom 5465 Total Depth of Well 6000
Show depth and thickness of all water, oil and gas formations.

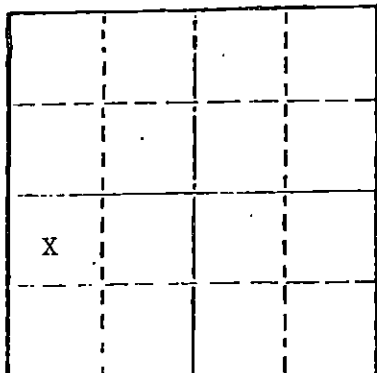

Locate well correctly on above
Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Des Moines		4931	5465	8-5/8"	745	0
Morrow		5465	5674	5-1/2"	5970	1212
Chester		5674	5788			
St. Genevieve		5788	5878			
St. Louis		5878	6000			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set CIBP at 4900' with 2 sacks of cement. Shot pipe at 2404', 1622', and 1212'.
Pumped 30 sacks of gel and 50 sacks of cement to 1200'. Pumped 50 sacks of cement from 800' to 700'. Put bridge and 10 sacks of cement from 40' to 0'. Cut off 8-5/8" casing 5' below surface.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Midwest Casing Pullers

STATE OF Kansas COUNTY OF Seward, ss.
Gale McCord (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Gale McCord
P. O. Box 432 Liberal, KS 67901
(Address)

Subscribed and sworn to before me this 26th day of July, 19 82



V. K. Bruce
Notary Public.

RECEIVED
STATE CORPORATION COMMISSION

JUL 28 1982

CONSERVATION DIVISION
Wichita, Kansas