

STATE OF KANSAS  
STATE CORPORATION COMMISSION


15-025-20103 0000  
WELL PLUGGING RECORD

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

CLARK County. Sec. 25 Twp. 31S Rge. (E) 22 (W)

Location as "NE/CNW&SW" or footage from lines NW NW SE NW  
Lease Owner MICHIGAN WISCONSIN PIPE LINE COMPANY  
Lease Name FOX Well No. 1  
Office Address Suite 1400, Fidelity Plaza, Okla. City, Okla. 73102  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed 3/21 19 76  
Application for plugging filed 3/21 19 76  
Application for plugging approved 3/21 19 76  
Plugging commenced 3/21 19 76  
Plugging completed 3/21 19 76  
Reason for abandonment of well or producing formation dry hole

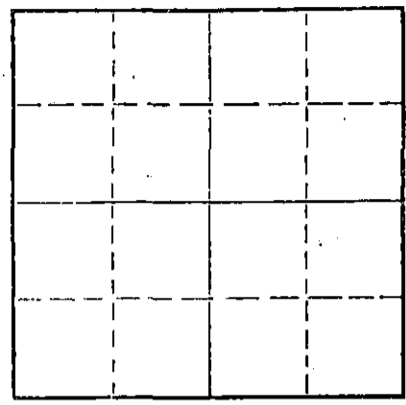

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas  
Producing formation Depth to top Bottom Total Depth of Well 5700 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Redbed		0	1020	8 5/8	1020	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st plug - 1000' w/50 sx  
2nd plug - 40' w/15 sx  
Bridge rate hole w/ 2 sx  
Compleat 9:30 am 3/21/76

RECEIVED  
STATE CORPORATION COMMISSION

APR 07 1976 4-7-76

CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor GABBERT-JONES, INC.  
Address 830 Sutton Place, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK  
GABBERT JONES INC. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack W. Gabbert  
GABBERT-JONES, INC. BY JACK W. GABBERT

Subscribed and Sworn to before me this 24 day of March, 1976



Nov. 29, 1979

(Address) Marjorie Hall, Notary Public.

GABBERT-JONES, INC.  
 WICHITA, KANSAS  
 DRILLERS' WELL LOG

15-25-20103-000

Fox #1  
 NW1/4SE1/4NW25-31S-22W  
 Clark County, Kansas

Commenced: 2-27-76

Completed: 3-21-76

OPERATOR: MICHIGAN WISCONSIN PIPE LINE COMPANY

From	Depth To	Formation	Remarks
0	90	Cement & Open Hole	
90	322	Redbed	
322	1020	Dry Drill	
1020	1420	Shale	Ran 25 jts of New 24#
1420	2230	Shale-Lime	8 5/8" csg set @ 1020' Cemented
2230	2320	Lime-Shale	w/275 sks Lite + 150 sks
2320	3230	Lime	Type A-3% CC - 150 sks
3230	3560	Lime-Shale	Howcolite @ 240' on Basket
3560	5700	Lime	PD @ 12:00 Noon 2-29-76
5700 - TD			Spot 550 sks Lite Wt w/3%CC + 5 yds Chat Complete 2:00 a.m. 3-1-76 DRY & ABANDONED

APR 07 1976  
 GENERAL REGISTRATION  
 WICHITA, KANSAS

I, James S. Sutton II, certify this is a correct copy of the Drillers' Log for the well drilled NW 1/4 SE 1/4 NW 25-31S-22W, Clark County Kansas to the best of my knowledge and belief.

*James S. Sutton II*  
 JAMES S. SUTTON II

STATE OF KANSAS )  
 ) SS  
 COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 25th day of March, 1976, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

*Elizabeth J. Edwards*  
 ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commission Expires: February 6, 1979.

