


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

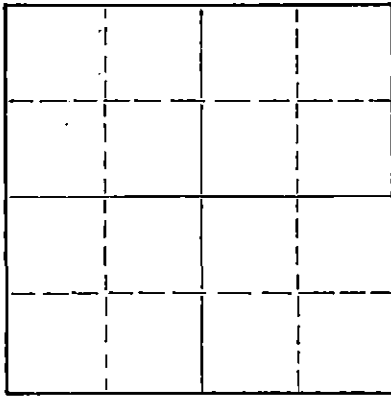

Locate well correctly on above
Section Plat

Sedgwick County. Sec. 1 Twp. 29 Rge. 1 ~~18~~ (W)
Location as "NE/CNW/SW" or footage from lines NW/4 NW/4 SE/4
Lease Owner Barnett Oil Company, Et Al
Lease Name Pannell Well No. 1
Office Address 411 First Nat'l Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 9, 1955
Application for plugging filed September 9, 1955
Application for plugging approved September 10, 1955
Plugging commenced September 9, 1955
Plugging completed September 9, 1955
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production - - - - - 19- -
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Ruel Durkee
Producing formation None Depth to top - - - - - Bottom - - - - - Total Depth of Well 3323 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
None				8 5/8"	150'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from - - - - - feet to - - - - - feet for each plug set.

Circulated heavy mud to bottom of surface pipe (150'),
set wooden plug at 145', dumped 1/2 sack of hulls and 15 sacks
of cement, dumped heavy mud up to 15', set wooden plug, Wired
at 15', dumped 1/2 sack of hulls and 5 sacks of cement to bottom
of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Barnett Drilling, Inc.
Address 409 First National Bank Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
F. H. Rousey (employee of owner) or (owner or operator)

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature)

F. H. Rousey
411 First National Bank Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of September, 1955

My commission expires February 27, 1956.

Notary Public.



STATE OF KANSAS
FILED
SEP 13 1955
9-13-55
CONSERVATION DIVISION
Wichita, Kansas

BARNETT OIL COMPANY
WELL LOG OF PANNELL NO. 1
NW/4 NW/4 SE/4 Section 1-29-1W
Sedgwick County, Kansas

Date Commenced: August 30, 1955
Date Completed: September 9, 1955

<u>From</u>	<u>To</u>	<u>Formation</u>	<u>Elevation: 1293 K.B.</u>
0	10	Surface	Tops: Kansas City - 2723
10	40	Shale	Mississippi - 3273
40	60	Sand	
60	80	Sandy Shale	
80	120	Shale	
120	150	Shale and Shells	
150	435	Lime and Shale	
435	620	Lime	
620	1110	Lime and Shale	
1110	1435	Shale	
1435	2360	Lime and Shale	
2360	2535	Shale, Lime and Sand	
2535	2720	Lime and Shale	
2720	2830	Lime	
2830	3323	Lime and Shale (Total Depth) (D. and A.)	

Set 150' of 8 5/8", 24# casing, cemented
with 160 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

CONSERVATION DIVISION
Wichita, Kansas

