

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

115-191-10274-0000
RGT REC'D
83 1937


Strike out upper line
when reporting plug-
ging off formations.

Sumner

County. Sec. 28 Twp. 31 Rge. 1 (E) (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW, SW, NE
Lease Owner The Texas Company.
Lease Name E. Carr Well No. 7
Office Address 614 Bitting Bldg., Wichita, Kansas.
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole
Date, well completed Sept. 24, 1937
Application for plugging filed Sept. 23, 1937
Application for plugging approved Sept. 27, 1937
Plugging Commenced Oct. 14, 1937
Plugging Completed Oct. 18, 1937
Reason for abandonment of well or producing formation Dry

NORTH

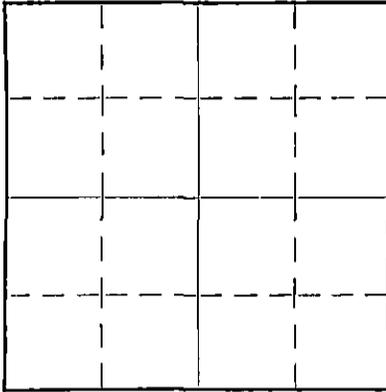

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 1937
Was permission obtained from the Conservation Division or its agents before plugging was commenced?
Yes

Name of Conservation Agent who supervised plugging of this well Fred Schuman
Producing formation Chat and Lime Depth to top 3654' Bottom 3758' Total Depth of Well 3758' Feet.
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8" OD	3654'	2795'
				13" OD	345'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with Mud to 2800'.
Big Hole Bridged at 346'.
Cemented With 10 Sks. of Cement.
Filled With Mud and Capped With
7 Sks. Cement.

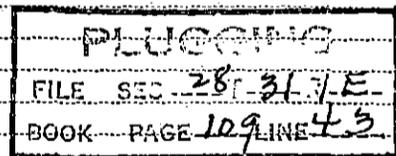

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Texas Company, Producing Dept.,
Address 614 Bitting Bldg., Wichita, Kansas.

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
M. C. Harrell

(employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

M. C. Harrell

(Address)

SUBSCRIBED AND SWORN to before me this 22nd day of October, 1937.

My commission expires August 26, 1941

Bertha W. Quits


Notary Public.

THE TEXAS CO.
 E. Carr No. 7.

SEC. 5 T. 32 R. 1W
 SW¹/₄ NE
 330' fr S & WL NE¹/₄

Total Depth. 3758'
 Comm. 7-30-37 Comp. 9-24-37
 Shot or Treated. 3000 Gals.
 Contractor. Springrose Drlg. Co.
 Issued. 10-23-37 Rotary O-3654
 Cable 3654-3758

County. Sumner




Elevation.

Production. Dry

Figures Indicate Bottom of Formations.

sand	40
shale & shells	347
shale, shells & lime	450
lime & shale	1210
shale	1410
shale & shells	1705
shale & lime	1805
lime	1930
shale & shells	2200
shale & lime	2380
brkn lime	2615
shale & lime	2890
brkn lime	3005
shale & lime	3155
brkn lime	3235
lime	3260
brkn lime	3360
lime	3495
brkn lime	3654
chat & lime	3758
Total Depth.	



FILE	5-T-32R-14
BOOK	GE-109 IE-43