


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Seward County, Sec. 24 Twp. 32S Rge. 31W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
660' FWL & 990' FNL

Lease Owner Whitaker Enterprises
Lease Name HAYDEN Hayden Well No. 1-24
Office Address Box 1274, Liberal, Kansas 67901
Character of Well (Completed as Oil, Gas or Dry Hole)

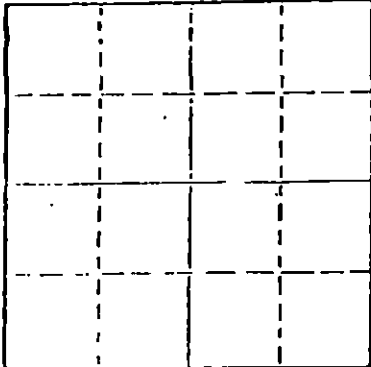

Locate well correctly on above
Section Plot

Dry Hole
Date Well completed January 8 1981
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced January 8 1981
Plugging completed January 8 1981
Reason for abandonment of well or producing formation

Dry Hole
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas, Garden City, KS
Producing formation Depth to top Bottom Total Depth of Well 6000'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface					
	Casing	0	1682'	8-5/8"	1682'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Plugged Hole w/60 sax cement @ 1700',
25 sax cement @ 700', 40 sax cement
@ 40', 5 sax cement in Rat hole.
Plug down @ 5:00 A.M.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton

STATE OF KANSAS COUNTY OF SEDGWICK, ss.

John R. Bartholomew of Sage Drilling Co. being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) John R. Bartholomew
222 Sutton Place, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of January, 1981


Louise K. Whitted
Notary Public.

My commission expires

RECEIVED
STATE CORPORATION COMMISSION

MAR 12 1981

CONSERVATION DIVISION
Wichita, Kansas



DRILLERS LOG

Hayden
HAYDEN NO. 1-24

CASING RECORD: 8-5/8" set @ 1682' w/700 sax cement
 OPERATOR: Whitaker Enterprises
 CONTRACTOR: Sage Drilling Co., Inc.
 COMMENCED: December 27, 1980
 COMPLETED: January 8, 1981
 DESCRIPTION: 660' FWL&990' FNL
 24-32S-31W
 Seward County,
 Kansas
 TOTAL DEPTH:
 6000'

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay & Sand	0	735	
Red Bed & Sand	735	1200	
Sand & Anhydrite	1200	1685	
Sand & Shale	1685	2035	
Shale	2035	2660	
Lime & Shale	2660	4960	
Shale & Lime	4960	5086	
Lime & Shale	5086	5353	
Shale & Lime	5353	5443	
Lime & Shale	5443	5707	
Shale & Lime	5707	5798	
Lime & Shale	5798	5930	DST #1 @ 5930'
Lime & Shale	5930	6000	Logged Hole. Run DST #2. D & A

I certify that this is a true and correct copy of the log on the above captioned well to the best of my knowledge.

SAGE DRILLING CO., INC.

By John R. Bartholomew
John R. Bartholomew

Subscribed and sworn to before me this 14th day of January, 1981.

Louise K. Whitted
Louise K. Whitted, Notary Public

