


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Sumner County, Sec. 19 Twp. 30 Rge. (E) 1 (W)

Location as "NE/GNW/SW" or footage from lines W/2 SW NE
Lease Owner Beardmore Drilling Company
Lease Name Carson Well No. 1
Office Address 700 - 120 Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 3-9 1966
Application for plugging filed 3-9 1966
Application for plugging approved 3-9 1966
Plugging commenced 3-9 1966
Plugging completed 3-9 1966
Reason for abandonment of well or producing formation dry hole

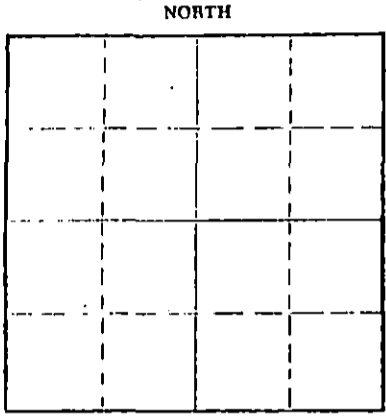

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Paul Turpin
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3785 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Soil		0	13'			
Shale		13'	170'			
Shale & Lime		170'	340'			
Anhydrite		340'	380'			
Shale & Lime		380'	393'	8-5/8"	393'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

0 to 35'	--	8 sacks cement
35'	--	wood plug
135' to 175'	--	heavy mud
175' to 225'	--	17 sacks cement
225'	--	wood plug
225' to 3785'	--	heavy mud

Also 2 sacks cement in rat hole

RECEIVED
STATE CORPORATION COMMISSION

APR 1 1966

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Shawver-Armour, Inc.
Address Central Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Heber Beardmore (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Heber Beardmore
700 - 120 Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 14th day of March, 1966

My commission expires 7-13-67

Shirley Ann Jackson
Shirley Ann Jackson, Notary Public.

DRILLER'S LOG

FARM NAME: CARSON # 1 LOCATION: W/2 SW/4 NE/4 Sec 19-30-1W
 Sumner County, Kansas
 CONTRACTOR: Shawver Armour, Inc. ELEVATION: 1293 KB
 OWNER: Beardmore Drlg. Co.
 COMMENCED: February 25, 1966 COMPLETED: March 9, 1966
 CASING RECORD: 393' 8 5/8" w/300 sacks HAS

=====

FORMATION:		TOPS:	
Soil & gumbo	13	Kansas City	3051
Shale	170	Mississippi	3713
Shale & Lime	340		
Anhydrite	393		
Anhydrite & Shale	560		
Shale & Lime	2040		
Lime	2130		
Lime & Shale	2450		
Shale & Lime	2749		
Sand	2845		
Shale & Lime	3070		
Lime	3282		
Shale & Lime	3376		
Lime & Shale	3458		
Shale & Lime	3630		
Lime & Shale	3713		
Mississippian	3722		
Core # 1	3733		
Core # 2	3758		
Lime	3785		
Rotary Total Depth	3785		

RECEIVED
 STATE CORPORATION COMMISSION
 APR 1 1966
 REGISTRATION DIVISION
 Topeka, Kansas

STATE OF KANSAS)
 SEDGWICK COUNTY) ss

I, James M. Armour, do hereby certify that the above log is a true and correct copy of the above captioned well as shown on the daily drilling reports.

SHAWVER ARMOUR, INC.

BY James M. Armour
 James M. Armour

Subscribed and sworn to before me this 21st day of March, 1966.

My commission expires Dec 10, 1967

Claire Jones
 Claire Jones, Notary Public