

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP 1

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
North

Meade County, Sec. 35 Twp. 32 Rge. 30 (E) (W) X
Location as "NE/SW/SE" or footage from lines C SE NE
Lease Owner McAdams Pipe & Supply Co.
Lease Name Holmes Well No. 14
Office Address Drawer 960 Bristow, Oklahoma 74010
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed December 18 19 58
Application for plugging filed Jan. 29 19 74
Application for plugging approved Jan. 30 19 74
Plugging commenced March 18 19 74
Plugging completed March 20 19 74
Reason for abandonment of well or producing formation Depleted

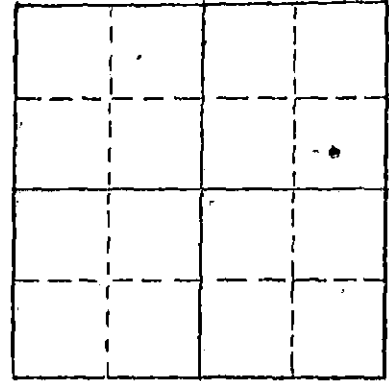

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production November 1966
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ed Eves
Producing formation Morrow Depth to top 5658 Bottom 5672 Total Depth of Well 5795 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	1614	none
				5 1/2	5792	2010

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pump 20 sks. of cement to 5500
Pump 35 sks. of cement @ 800 to 700
Put 15 sks. of cement @ 45 to 0

RECEIVED
STATE CORPORATION COMMISSION
APR 10 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Sargents Casing Pulling Service Kansas No. 511
Address Box 506 Liberal, Kansas 67901

STATE OF OKLAHOMA COUNTY OF CREEK ss.
T. P. McAdams, Jr. (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature] P. O. Drawer 960 - Bristow, Okla 74020 (Address)

Subscribed and sworn to before me this 8th day of April 1974

My commission expires 9-23-75 [Signature] Notary Public.


15-119-10025-2000 COPY
WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
 508 East Murdock, Wichita, Kansas

Company. **COLORADO OIL & GAS**
 Farm. **Holmes** No. **14**

SEC. **35** T. **32** R. **30W**
 C SE NE

Total Depth. **5795'**
 Comm. **11-13-58** Comp. **12-1-58**
 Shot or Treated.
 Contractor. **Garvey Drig.**
 Issued. **5-2-59**

County **Meade**
KANSAS



Elevation. **2727'** DF

Production. **4,650,000** CFG

CASING:

8 5/8" 1615' cem w/850 sz.
5 1/2" 5795' cem w/100 sz.

Figures indicate Bottom of Formations.

sand	190
sand , shells	610
red beds	620
gyp & red beds	650
red bed	350
sand, shells	950
sand	1000
shale, shells	1075
shale, shells, sand streaks	1500
gyp, rock	1615
gypsum & shale	2155
shale, shells	2410
shale, lime	2600
sdv lime	2690
sdv shale & lime	2885
shale, lime	2909
shale	3000
lime	3084
chalky lime	3219
shale, lime	3420
chalky lime & shale	3570
shale, lime	3835
lime	3910
shale, lime	4275
shale	4355
shale, lime	4490
lime	5047
sdv lime	5084
lime	5635
coreing	5635-5681
Core #1	5681-5685
Reaming Core Hole	5668-5685
shale, lime	5795
Total Depth	

TOPS: SCOUT

Lansing	4525
Marmaton	5129
Cherokee	5300
Morrow	5619
Mississippi	5694

RECEIVED
 STATE CORPORATION COMMISSION

JAN 30 1974

CONSERVATION DIVISION
 Wichita, Kansas