


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-1

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217

WELL PLUGGING RECORD

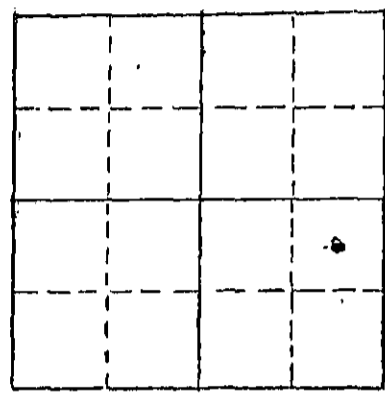

Locate well correctly on above Section Plat

Meade County, Sec. 35 Twp. 32 Rge. 30 (E) (W) X
Location as "NE/CNW4SW4" or footage from lines C NE SE
Lease Owner: McAdams Pipe & Supply Co.
Lease Name: Holmes Well No. 13
Office Address: Drawer 960 Bristow, Oklahoma 71010
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed June 11 1957
Application for plugging filed Jan. 29 1971
Application for plugging approved Jan. 30 1971
Plugging commenced March 29 1971
Plugging completed April 2 1971
Reason for abandonment of well or producing formation Depleted
If a producing well is abandoned, date of last production February 1971
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ed Eves
Producing formation Morrow Depth to top 5656 Bottom 5678 Total Depth of Well 5820 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	1618	none
				5 1/2	5798	2858

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pump 20 sks. of cement to 5150
Pump 35 sks. of cement @ 900 to 800
Put 15 sks. of cement @ 15 to 0

RECEIVED
STATE CORPORATION COMMISSION
APR 25 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor: Sargents Casing Pulling Service Kansas No. 511
Address: Box 506 Liberal, Kansas 67901

STATE OF OKLAHOMA COUNTY OF CREEK ss.
T. P. McAdams, Jr. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
P. O. Drawer 960 - Bristow, Okla. 74010 (Address)

Subscribed and Sworn to before me this 22nd day of April 1974

My commission expires September 23, 1975 [Signature] Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


Company- COLORADO OIL & GAS CO.
Farm- Holmes No.13

SEC. 35 T. 32 R. 30W
C NE SE

Total Depth. 5820
Comm. 5-12-57
Shot or Treated.
Contractor.
Issued. 7-27-57

Comp. 6-3-57

County Meade KANSAS



Elevation. 2730

Production. 3000 BOPD

CASING:

8 5/8 1632'
5 1/2 5820'

Figures indicate Bottom of Formations.

sand	510
sand & shells	800
red bed & shells	1002
red bed	1200
red bed; shale & anhydrite	1595
red bed, shale, shells, & anhydrite	2170
shale & lime	2380
shale & shells	2550
shale, lime & chert	2770
shale	2875
shale & lime	3055
shale	3080
lime	3148
lime & shale	4600
lime	4985
shale & lime	5180
lime	5485
lime & shale	5530
lime	5536
shale & lime	5653
coring	5665
reaming	5700
lime & shale	5730
lime	5820
Total Depth	

TOPS:

Lansing	4537
Marmaton	5143
Cherokee	4317
Morrow sand	5654
Mississippi	5710

RECEIVED
STATE CORPORATION COMMISSION
JAN 30 1974
CONSERVATION DIVISION
Wichita, Kansas