

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Building  
Wichita, Kansas 67202

WELL PLUGGING RECORD  
K.A.R.-82-3-117

API NUMBER 15-119-10137-0000

LEASE NAME Herman A

WELL NUMBER 1

         Ft. from S Section Line

         Ft. from E Section Line

SEC. 33 TWP. 32S RGE. 30 (E) or (W)

COUNTY Meade

Date Well Completed Dec. 1956

Plugging Commenced May 12, 1993

Plugging Completed May 14, 1993

TYPE OR PRINT  
NOTICE: Fill out completely  
and return to Cons. Div.  
office within 30 days.

LEASE OPERATOR Phillips Petroleum Co.

ADDRESS Box 358, Borger, TX 79008-0358

PHONE#( 806 ) 275-3383 OPERATORS LICENSE NO. 5229

Character of Well Good

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

The plugging proposal was approved on May 12, 1993 (date)

by Lacy (KCC District Agent's Name).

Is ACO-1 filed? yes If not, Is well log attached?         

Producing Formation Marrow-Keys sand Depth to Top          Bottom          T.D. 5720

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out
				8 5/8	1804	none
				5 1/2	5700	2500

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from          feet to          feet each section.  
CTBP at 5524, 2sx cement on top of Plug, loaded hole with mud, spotted cement at 1854, 75sx class H, spotted 40sx at 679, circulated from 40' to surface with 25sx cement, welded plat 5' below surface with needle valve

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Clarke Corporation License No. 5105

Address P.O. Box 187, Medicine Lodge, KS 67104


NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Phillips Petroleum Company

STATE OF Kansas COUNTY OF Barber, ss.

Jeff Sletto (Employee of Operator) (Operator)  
above-described well, being first duly sworn on oath, says: That I have knowledge of the fact statements, and matters herein contained and the log of the above-described well as filed therewith are true and correct, so help me God.

(Signature) Jeff Sletto

(Address) Medicine Lodge, KS 67104



SUBSCRIBED AND SWORN TO before me this 18 day of May, 1993

Glenda Morrison  
Notary Public

My Commission Expires: August 17, 1994

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 19 1993  
CONSERVATION DIVISION

Herman A-1  
 660' FNL & 657' FWL  
 33-T32S-R30W  
 Meade Co., Kansas


Proposed P&A Schematic

15-119-10137-0000

Spud 10 Nov 56  
 Completed 2 Dec 56  
 GL 2743' RKR 2756'  
**RECEIVED**  
 KANSAS CORPORATION COMMISSION

MAY 06 1993

CONSERVATION DIVISION  
 WICHITA, KS

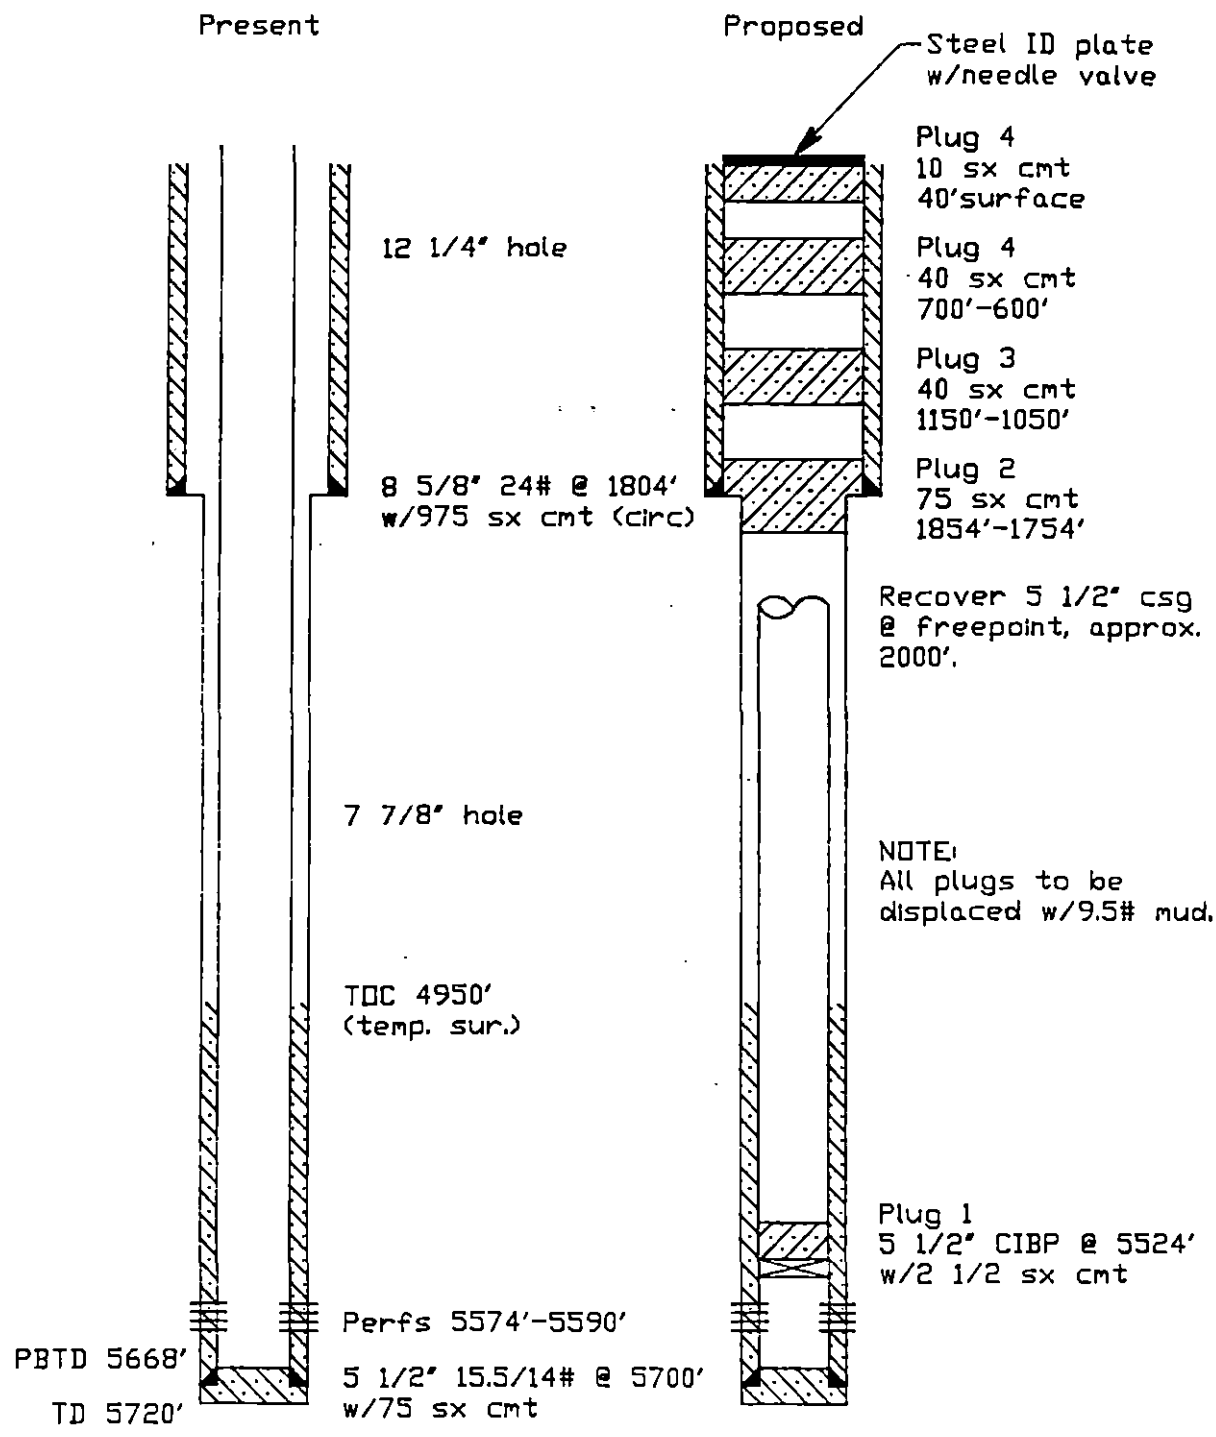

J r m .  
 8 May 91  
 Not drawn to scale