

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Seward County, Sec. 14 Twp. 32S Rge. (E) 31 (W) 330 FNL & 330 FWL

Location as "NE/CNWESW" or footage from lines Macey & Mershon Oil, Inc.

Lease Owner Macey & Mershon Oil, Inc.

Lease Name Reiss Well No. 1

Office Address 1600 Broadway, Denver, Colorado 80202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed January 12, 1980

Application for plugging filed (Letter 1-16-80) Phone 1-12 1980

Application for plugging approved 1-12 1980


Plugging commenced 1-12 1980

Plugging completed 1-13 1980

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

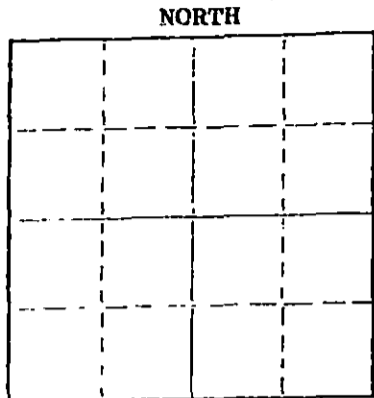

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Clarence Thomas

Producing formation Depth to top Bottom Total Depth of Well 6000

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, FEET IN, PULLED OUT. Row 1: 0, 1699, 8 5/8, 1699, 0.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill hole with heavy mud to 1700 feet. Set first plug at 1700 feet with 500 sacks of cement. Fill hole with heavy mud to 700 feet. Set second plug at 700 feet with 2 sacks cement. Fill hole with heavy mud to 40 feet. Set third plug with 10 sacks cement. Put 5 sacks in rat hole and 5 sacks in mouse hole. Job complete at 1:00 A.M., January 13, 1980.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Zenith Drilling Corporation

Address Suite 505 Fourth Financial Center, Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF SEDGWICK ss.

Emmet E. Hall (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Emmet E. Hall

505 Fourth Financial Center, Wichita, Ks. 67202 (Address)

SUBSCRIBED AND SWORN TO before me this 16th day of January, 1980.

My commission expires December 15, 1980

Sharon R. Allen Notary Public.

RECEIVED STATE CORPORATION COMMISSION

JAN 17 1980

CONSERVATION DIVISION Wichita, Kansas

WELL LOG

COMPANY Macey & Mershon Oil, Inc.

SEC. 14-32S-31W

FARM Reiss

NO. 1

LOC. 330' FNL & 330' FWL

TOTAL DEPTH 6000

COUNTY Seward, Kansas

COMM. 12/30/79

COMP. 1/13/80

CONTRACTOR Zenith Drilling Corporation

CASING
1699' of 8 5/8", 24# casing, cemented with 1000 sacks
cement

ELEVATION

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

103	Sand
1480	Sand & Red Bed
1700	Red Bed & Anhydrite
1760	Red Bed & Shells
2290	Shells
2660	Sand & Shale
3995	Lime & Shale
4135	Lime
6000	Lime & Shale

RECEIVED
STATE CORPORATION COMMISSION

JAN 17 1980

CONSERVATION DIVISION
Wichita, Kansas

State of KANSAS }
County of SEDGWICK } ss

I, Emmet E. Hall of Zenith Drilling Corporation
upon oath state the above and foregoing is a true and correct copy of the log of the Reiss #1 well.

Emmet E. Hall

Subscribed and sworn to before me this 16th day of January, 19 80.

My Commission Expires: Dec. 15, 1980

Sharon R. Allen
Sharon R. Allen NOTARY PUBLIC