


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Seward County, Sec. 26 Twp. 32S Rge. 31 E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
C SW SW  
Lease Owner Broughton Oil Company  
Lease Name Wills Well No. 1  
Office Address 800 Park Harvey Center, Oklahoma City, OK 73102  
Character of Well (Completed as Oil, Gas or Dry Hole) Gas  
Date Well completed 7-22 1978  
Application for plugging filed 12-19 1979  
Application for plugging approved 12-21 1979  
Plugging commenced 12-22 1979  
Plugging completed 12-27 1979  
Reason for abandonment of well or producing formation depleted

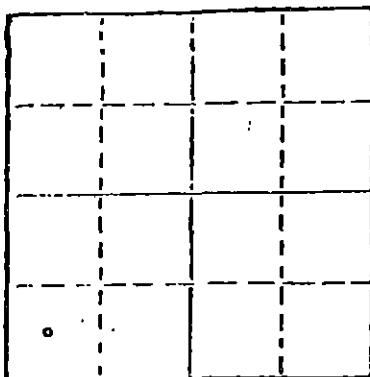

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 12-15 1979  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas  
Producing formation Morrow Depth to top 5588 Bottom 5590 Total Depth of Well 5776  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1569	none
				4 1/2"	5703	3038

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged well as follows: 15 sacks of cement @ 5600' to 5450'  
35 sacks of cement @ 1560' to 1460'  
25 sacks of cement @ 800' to 700'  
10 sacks of cement @ 40' to 0

RECEIVED  
STATE CORPORATION COMMISSION

JAN 10 1980

CONSERVATION DIVISION  
Kansas


(If additional description is necessary, use BACK of this sheet.)  
Name of Plugging Contractor Sargent's Casing Pulling Service, Box 506; Liberal, Kansas 67901

STATE OF KANSAS COUNTY OF SEWARD, ss.  
Ned E. Lowry (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed \_\_\_\_\_ at the same are true and correct. So help me God.

(Signature) Ned E. Lowry  
PO Box 1578, Liberal, Kansas 67901  
(Address)

WORN TO before me this 9th day of January, 19 80



Jimmy Lee Barlow  
Notary Public.

My commission expires 4-13-82