


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

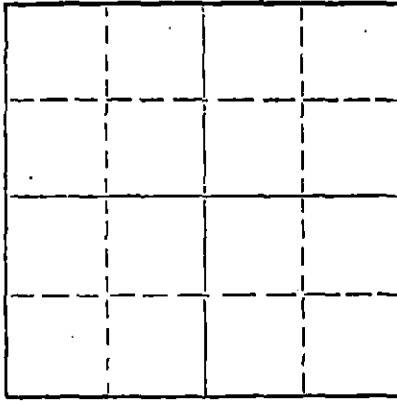

Locate well correctly on above
Section Plat

Kingman County. Sec. 4 Twp. 30S Rge. (E) 6 (W)
Location as "NE/CNWxSWx" or footage from lines. C NW NE
Lease Owner Pickrell Drilling Company
Lease Name Ravenstein "C" No. 2 Well No. 2
Office Address 705 4th Natl Bank Bldg, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 10, 19 66
Application for plugging filed April 10, 19 66
Application for plugging approved April 10, 19 66
Plugging commenced April 10, 19 66
Plugging completed April 10, 19 66
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie V Elving
Producing formation Depth to top Bottom Total Depth of Well 760 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	209'	None


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud to 200', set plug. Cemented with
25 sacks cement. Heavy mud to 40', set plug.
Cemented with 10 sacks cement to bottom of
cellar. Plugged rat hole with 2 sacks cement.

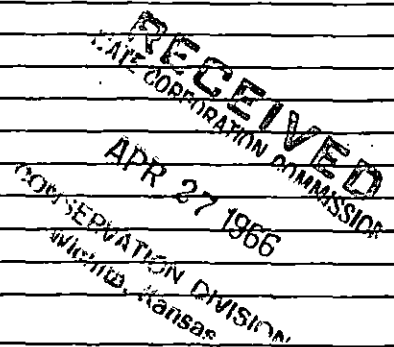

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Pickrell Drilling Company
Address 705 4th National Bank Bldg, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
I, _____, Notary Public, do hereby certify that _____ (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) C. W. Sebies
705 4th National Bank Bldg, Wichita, Kansas
(Address)

Subscribed and sworn to before me this 18th day of April, 19 66
Maxine Blackman
Maxine Blackman, Notary Public.
My commission expires June 21, 1966

ROTARY DRILLING LOG

COMPANY: PICKRELL DRILLING COMPANY
705 4th Natl Bank Bldg.
Wichita, Kansas

Rotary Drilling Commenced 4-3-66

Rotary Drilling Completed 4-10-66

LOCATION: C NW NE Section 4-30-6W, Kingman County, Kansas
Ravenstein "C" No. 2

CONTRACTOR: **PICKRELL DRILLING COMPANY**
Wichita, Kansas

CASING RECORD: (9 jts) 8 5/8" surface casing set at 209', cemented with 140 sacks cement. Circulated. Completed 7:00 P.M. April 3, 1966. No oil string run, D & A.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

15	Sand	<u>C. F. S.</u>
209	Red Rock	3300
1025	Shale	3595
3100	Lime & Shale	3670
3282	Sand & Shale	3690
3300	Lansing	3725
3430	Shale & Lime	3730
3560	Lime	3736
3640	Lime & Shale	3760
3700	Lime	
3725	K. C.	
3760	Lime - RTD	
		<u>Slope Tests</u>
		2200
		2700
		3200
		3700
		<u>S. L. M.</u>
		3100
		3425
		3670

RECEIVED
STATE CORPORATION COMMISSION
APR 27 1966
CONSERVATION DIVISION
Wichita, Kansas

The undersigned, C. W. SEBITS, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY
By [Signature]
C. W. SEBITS, Attorney-in-Fact

STATE OF KANSAS
COUNTY OF SEDGWICK } ss.:

On this 18th day of April, 1966, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. SEBITS, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires: June 21, 1966

[Signature]
Maxine Blackman, Notary Public