

15-095-00385-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Kingman County, Sec. 12 Twp. 30 Rge. 6 (E) 6 (W)

Location as "NE/CNW/SW" or footage from lines NW NW NW

Lease Owner Pickrell Drilling Company, et al

Lease Name Stephenson Well No. 1

Office Address 705 Fourth Nat'l Bank Bldg., Wichita

Character of Well (completed as Oil, Gas or Dry Hole) D&A

Date well completed 5/1 1954


Application for plugging filed 5/1 1954

Application for plugging approved 5/1 1954

Plugging commenced 5/1 1954

Plugging completed 5/1 1954

Reason for abandonment of well or producing formation D&A



Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel E. Durkee

Producing formation Depth to top Bottom Total Depth of Well 4648 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT	
			160'	8 5/8"	Smls	None	
			No oil string was run.				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with heavy drilling mud & set bridge at 160',  
filled with 15 sacks, set second bridge at 20', filled  
with 15 sacks cement to bottom of cellar.

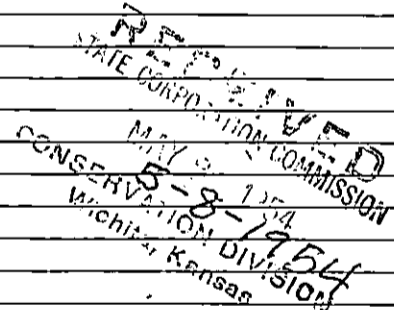

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pickrell Drilling Company  
Address 705 Fourth National Bank Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
C. W. Sebitt


being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *C. W. Sebitt*  
PICKRELL DRILLING COMPANY  
705 Fourth Nat'l Bank Bldg., Wichita

SUBSCRIBED AND SWORN TO before me this 5th day of May, 1954

*Ethel Zimmerman*  
Notary Public.

My commission expires January 28, 1957

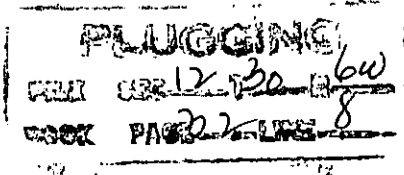

ROTARY DRILLING LOG

COMPANY: **Pickrell Drilling Company, et al**

Rotary Drilling Commenced 4/14/54

LOCATION: **Stephenson #1  
NW NW NW - Sec. 12-30S-6W  
Kingman County, Kansas**

Rotary Drilling Completed 5/1/54

CONTRACTOR: **PICKRELL DRILLING COMPANY  
Wichita, Kansas**

CASING RECORD:

8 5/8" 2 1/2# J-55 Smls. Casing set at 160' with 150 sacks bulk cement, circulated.

Filled with heavy drilling mud and set bridge at 160', filled with 15 sacks cement, set second bridge at 20', filled with 15 sacks cement to bottom of cellar.

LOG

(Figures indicate bottom of formation - measurements from top of rotary bushing.)

Sand	54	Circ. for Samples	4125
Red Rock	160	" " "	4140
Red Bed & shale	350	" " "	4155
Shale	900	" " "	4489
Hard Sand	935	" " "	4492
Shale	960	" " "	4502
Shale Lime	1195	" " "	4507
Lime <del>XXXXXX</del>	1815	" " "	4517
Lime & shale	2010	" " "	4532
Shale	2420	" " "	4534
Shale & lime	2555	" " "	4600
Lime	2675	" " "	4648
Lime & shale	2774		
Lime	4117		
Chert	4155	S.L.M. @ 1815 - O.K.	
Lime	4618	S.L.M. @ 3776 - O.K.	
Arbuckle	4648	RTD	

Slope Test at 1815 - 0° off  
Slope Test at 3776 - 0° off

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 8 - 1954  
CONSERVATION DIVISION  
Wichita, Kansas

The undersigned, C. W. Sebitts, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY  
By C. W. Sebitts  
Attorney-in-Fact

STATE OF KANSAS, }  
COUNTY OF SEDGWICK } ss.:

On this 5th day of May, 1954, before me the undersigned, a Notary Public, in and for

the County and State aforesaid, personally appeared C. W. Sebitts, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

Ethel Zimmerman  
Notary Public

My commission expires: January 28, 1957

PLUGGING  
MAY 12 1954  
C. W. Sebitts