


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Location as Summer County, Sec. 21 Twp. 30 Rge. 3W E/W
"NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines C NE NW

Lease Owner Mack Oil Company
Lease Name Good #2 Well No. _____
Office Address Great Bend, Kansas 67530
Character of Well (Completed as Oil, Gas or Dry Hole) _____

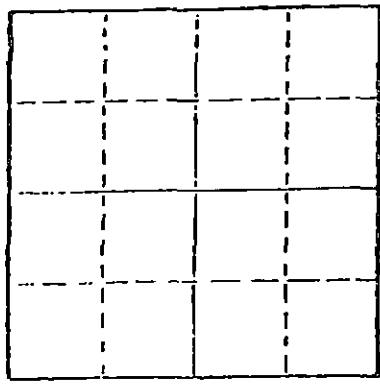

Locate well correctly on above
Section Plat

Date Well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 3/27/78 _____ 19____
Plugging completed 3/29/78 _____ 19____
Reason for abandonment of well or producing formation
depleted. _____

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Barnett
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4320
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION DATE	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
APR 4	10-1978 G.W.S. Co. Wichita Kansas			8-5/8 4 1/2"	205 4320	none 3743'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded to 4225' and ran 4 sacks cement. Shot pipe at 375' 3725' and pulled 114 joints. Mudded hole to 230', set 10' rock bridge and filled hole with 3 1/2 yards ready mix from 220' to base of cellar.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
R. DARRELL KELSO (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 31st day of March, 19 78



Margaret Melcher
Notary Public.

My commission expires _____

MACK OIL COMPANY
Duncan, Oklahoma
73533

DRILLERS WELL LOG

#2 Good 150' S C NE NW - SECTION 21-30S-3W
Sumner County, Kansas
Commenced R.D. 6-29-71 Elevation: 1335' K.B., 1328' G.L.
Completed R.D. 7-9-71 Initial Production: Oil
Rotary Total Depth: 4320' Contractor: Thomas Drilling Company

STRATA	DEPTH
Redbed & Shale	0 - 250
Shale	250 - 625
Anhydrite	625 - 1055
Shale	1055 - 1880
Shale & Lime	1880 - 2907
Sand	2907 - 2990
Lime	2990 - 4189
Shale & Sand	4189 - 4260
Sand	4260 - 4320 RTD

I hereby certify that the above is a true and correct log of said well as reflected by the daily drilling reports.

MACK OIL COMPANY

By J. Corry Tinsmon
J. Corry Tinsmon

Signed and sworn to in my presence
this 23rd day of July, 1971, by
J. Corry Tinsmon, representative
of Mack Oil Company.

Beverly Mann
Beverly Mann, Notary Public

My commission expires:
February 10, 1975

