

WELL PLUGGING RECORD

All Information Completely  
Required Affidavit  
or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Kingman County, Sec. 6 Twp. 29S Rge. 5W ~~XE~~ (W)

Location as "NE/CNW/SW" or footage from lines C SW SW

Lease Owner Leben Drilling, Inc.

Lease Name Kostner Well No. 1

Office Address P. O. Box 486, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 10-20-63 19

Application for plugging filed 10-29-63 19

Application for plugging approved 10-29-63 19


Plugging commenced 10-29-63 19

Plugging completed 10-29-63 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

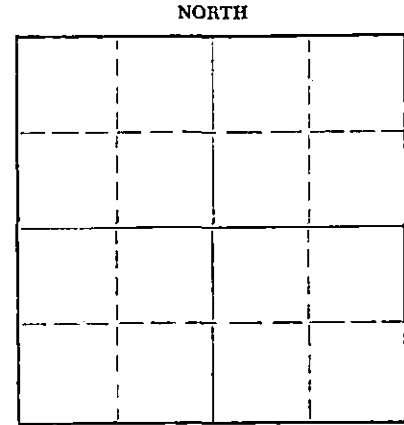

Name of Conservation Agent who supervised plugging of this well Archie Elving, Pratt, Kansas

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4400 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	194.32'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Mud to 240' Plug & 1/2 sack hulls & 30 sacks cement

Mud to 40' 1/2 sack hulls and 10 sacks cement

RECEIVED  
STATE CORPORATION COMMISSION

NOV 4 1963

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling, Inc.  
Address P. O. Box 486, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.  
Leslie Kite

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite

P. O. Box 486, Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 31st day of October, 1963

My commission expires April 1, 1967

Ulanda Nichols  
Ulanda Nichols

Notary Public.

DRILLER'S LOG

COMPANY: Leben Drilling, Inc.  
 CONTRACTOR: LEBEN DRILLING, INC.  
 FARM: KOSTNER #1  
 LOCATION: C SW SW Sec. 6-29S-5W  
 KINGMAN COUNTY, KANSAS  
 COMMENCED: 10-12-63  
 COMPLETED: 10-29-63

0	194	Redbed
194	300	Redbed
300	465	Shale & Shells
465	861	Shale
861	876	Anhydrite
876	1020	Lime & Shale
1020	1330	Lime
1330	1500	Lime & Shale
1500	1585	Lime
1585	1810	Lime & Shale
1810	2265	Shale & Lime
2265	2500	Shale & Shells
2500	2930	Lime & Shale
2930	3035	Shale & Sand
3035	3150	Shale & Shells
3150	3245	Lime
3245	3400	Lime & Shale
3400	3600	Lime
3600	3663	Shale & Lime
3663	3795	Lime
3795	3895	Lime & Shale
3895	3943	Shale & Lime
3943	3979	Mississippi Chat
3979	4095	Lime & Chert
4095	4186	Lime
4186	4286	Shale & Lime
4286	4330	Lime & Shale
4330	4336	Lime
4336	4379	Simpson Sand
4379	4400	Shale & Lime
	<u>4400</u>	<u>Rotary Total Depth - D. &amp; A.</u>

RECEIVED  
 STATE CORPORATION COMMISSION

NOV 4 1963

CONSERVATION DIVISION  
 Wichita, Kansas

Set 8 5/8" surface casing @ 194.32' Cemented with 100 sacks Posmix 2% c.c. Surface set by Rosencrantz Bemis Drilling Company, Box 713, Great Bend, Kansas. Leben Drilling, Inc. drilled well from surface to Total Depth.

I, Leslie Kite, do certify that the above and foregoing is a true and correct copy of the log of the Kostner #1 well, located in C SW SW of Section 6, Township 29 South, Range 5 West, Kingman County, Kansas, as reflected by the files of Leben Drilling, Inc. and also Rosencrantz Bemis Drilling Company.

Leslie Kite  
 Leslie Kite

STATE OF KANSAS }  
 COUNTY OF BARTON } SS

Subscribed and sworn to before me, a Notary Public, in and for Barton County, Kansas, this 1st day of November, 1963.

Ulanda Nichols  
 Ulanda Nichols

My Commission Expires: April 1, 1967