


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Sedgwick County, Sec. 25 Twp. 29S Rge. (E)3W (W)

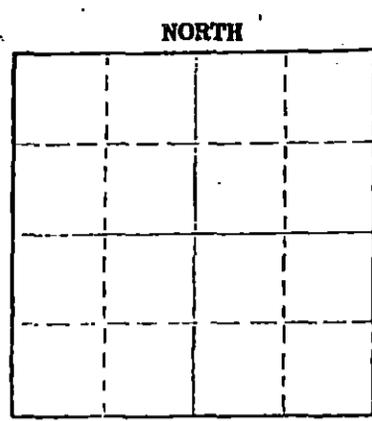

Locate well correctly on above Section Plot

Location as "NE/CNW/SW" or footage from lines C NW SW  
Lease Owner HUMMON OIL COMPANY  
Lease Name Workman Well No. 1  
Office Address 860 Sutton Place, Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 2-15-1975  
Application for plugging filed 2-15-1975  
Application for plugging approved 2-15-1975  
Plugging commenced 2-15-1975  
Plugging completed 2-15-1975  
Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered.  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ted Dewey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4130 feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	Water	Surface	255	8-5/8"	242	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Fluid to 260', plug, 25 sx cement;  
Fluid to 40', plug, 10 sx cement;  
Two sacks cement in rat hole.

Name of Plugging Contractor D N B DRILLING, INC.  
Address 701 First National Building  
Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF \_\_\_\_\_ ss.  
JAMES L. DONELSON (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson  
701 First Nat'l Bldg., Wichita, Ks.  
(Address)

Subscribed and Sworn to before me this 21st day of February 1975

My commission expires August 25, 1976

Ella Priess  
Notary Public

RECEIVED  
STATE CORPORATION COMMISSION  
1975  
2-24-75  
CONSERVATION DIVISION  
Wichita, Kansas

Ella Priess  
STATE NOTARY PUBLIC  
Sedgwick County, Kansas  
My Com. Expires Aug. 25, 1976

HUMMON OIL COMPANY  
No. 1 Workman  
C NW SW, Sec. 25-29S-3W  
Sedgwick County, Kansas

DRILLERS' LOG

Commenced: 2-1-75  
Completed: 2-15-75

Elevation: 1295 K.B.

Surface: 242' of 8-5/8"  
cemented w/115 sx common  
cement, 2% cc, 2% Gel.  
11-23-74.

<u>FORMATION</u>	<u>DEPTH</u>
Surface Hole	0 - 255
Shale	255 - 370
Shale & Lime	370 - 1375
Lime & Shale	1375 - 2545
Sand & Shale	2545 - 2575
Shale & Lime	2575 - 2698
Lime & Shale	2698 - 2789
Sand	2789 - 2881
Shale & Lime	2881 - 2918
Lime & Shale	2918 - 3063
Lime	3063 - 3571
Lime & Shale	3571 - 3658
Lime	3658 - 3753
Lime & Chert	3753 - 3829
Lime	3829 - 4130 RTD

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 24 1975  
CONSERVATION DIVISION  
Wichita, Kansas

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

*James L. Donelson*  
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me, the undersigned, a Notary Public in and for said state, this 21st day of February, 1975.

My Commission Expires:  
August 25, 1976

*Ella Priess*  
Ella Priess, Notary Public

*Ella Priess*  
STATE NOTARY PUBLIC  
Sedgwick County, Kansas  
My Com. Expires Aug. 25, 1976