

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-119-10024-00-02
Spot: CNESE Sec/Twnshp/Rge: 35-32S-30W
1982 feet from S Section Line, 660 feet from E Section Line
Lease/Unit Name: STEVENS (MORROW) UNIT Well Number: 3509
County: MEADE Total Vertical Depth: 5810 feet

Operator License No.: 32198
Op Name: PETROSANTANDER (USA) INC.
Address: 6363 WOODWAY STE. 350
HOUSTON, TX 77057

\$188.83

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 04/01/2003 12:35 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: PETE KUNEYL Company: PETROSANTANDER Phone: (316) 275-2388

Proposed Plugging Method: 1st PLUG @ 1600' 50 SX CMT., 2nd PLUG @ 600' 40 SX CMT., 3rd PLUG @ 40' 10 SX CMT.

Plugging Proposal Received By: STEVE MIDDLETON Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 04/01/2003 1:45 PM KCC Agent: STEVE MIDDLETON

Actual Plugging Report:


PBTD 5798'. PERFS AT 5656-5678'. CIBP @ 5600' WITH 2 SX CMT ON TOP. 1ST PLUG PULL CASING TO 1650'. LOAD HOLE WITH MUD & SPOT 50 SX CMT. 2ND PLUG PULL TO 550' & SPOT 40 SX CMT. 3RD PLUG PULL TO 40' & SPOT 10 SX CMT. STAYED FULL.

RECEIVED
APR 04 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 2498' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

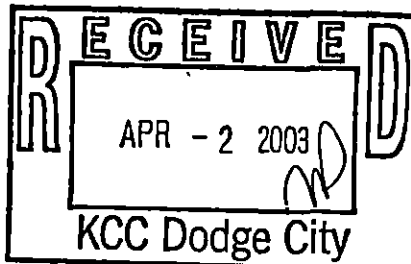

INVOICED
DATE 4-4-03
INV. NO. 2003061377

Form CPN3