


WELL PLUGGING RECORD

STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Kingman County, Sec. 4 Twp. 30S Rge. (E) 6 (W)

Location as "NE/CNW%SW%" or footage from lines NW NW NW  
Lease Owner Petroleum Management, Inc.  
Lease Name Ravenstein Well No. 2  
Office Address 1019 Central Building, Wichita 2, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed 4-10- 1956  
Application for plugging filed 7-11- 1960  
Application for plugging approved 7-12- 1960  
Plugging commenced 8-11- 1960  
Plugging completed 8-22- 1960  
Reason for abandonment of well or producing formation Depleted

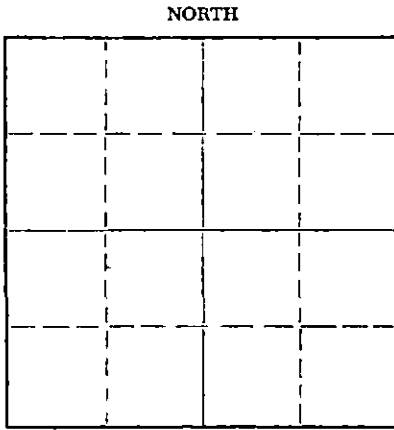

Locate well correctly on above Section Flat

If a producing well is abandoned, date of last production 7-1- 1960  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well J. Lewis Brock  
Producing formation Kansas City Depth to top 3500 Bottom 3683 Total Depth of Well 3683 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Kansas City	Oil	3680	3683	8 5/8" OD 5 1/2" OD	169 3683	None 3100

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Dumped 5 sacks cement with bailer at T.D. of 3685'. Filled with mud to 165', set rock bridge and dumped 15 sacks cement, filled with mud to 50', dumped 10 sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 18 1960  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Red Top Drilling Company  
Address Winfield, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
John W. Ritchey (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John W. Ritchey  
(Address)

SUBSCRIBED AND SWORN to before me this 17th day of October, 19 60

Mace C. Murphy Notary Public.

My commission expires April 23, 1962


**COPY**

Company- SATURN OIL & GAS Co., et al  
Farm- Ravenstein No. 2

SEC. 4 T. 30 R. 6W  
NW NW NW

Total Depth. 3685  
Cased. 3-30-56 4-10-56  
Shoe of Trapped.  
Contractor. McKnab & Lindsay  
Issued. 7-28-56

County Kingman  
KANSAS



CASING:  
8 5/8" 169' cem w/125 sk  
5 1/2" 3683' cem w/100 sk

Elevation. 1459 RB  
Production. 30 bopd

Figures indicate Bottom of Formations.

shale, red bed	188
shale, shells, sand	888
lime bkn, shale	1210
shale lime, hard sand	1480
sand hrd, lime	1595
lime, shale	2450
sand, shale	2535
shale, lime	2790
sand hrd, lime	2852
shale, lime	3004
shale, sand	3279
lime, shale	3518
lime	3582
lime, shale	3610
lime	3685
Total Depth	
Tops: Scout	
Lansing	3220
Kansas City	3500

**RECEIVED**

SEP 12 1960

PETROLEUM MANAGEMENT, INC.

**RECEIVED**

STATE CORPORATION COMMISSION

OCT 18 1960

CONSERVATION DIVISION  
Wichita, Kansas