


STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Bldg.
Wichita, Kansas 67202

Form CP-4
Rev. 12-15-80

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit

COUNTY Pratt SEC. 6 TWP. 28S RGE. 12 W
Location as in quarters or footage from lines:
2310' fS1 330' fW1

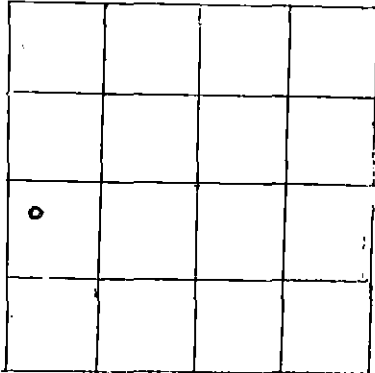

Lease Owner S & K Oil Company
Lease Name Travis Well No. 1
Office Address P. O. Box 559, Tulsa, Oklahoma 74101
Character of Well (Completed as Oil, Gas or Dry Hole): Dry Hole
Date Well Completed 6/12/83
Application for plugging filed 6/12/83
Plugging commenced 6/12/83 2: 15 am
Plugging completed 6/12/83 4:00 am

Locate Well
correctly on above
Section Platt.

Reason for abandonment of well or producing formation no
commercial quantity of oil or gas encountered.

Was permission obtained from the Conservation Division or it's
Agent's before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Steve Durant

Producing formation _____ Depth to top _____ bottom _____ T.D. 4480

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
Surface hole	shale	Surf.	360	10 3/4	359.65	none
Surface hole	sand & shale	surf	909	8 5/8	908.69	none

Describe in detail the manner in which the well was plugged, indicating where the mud
fluid was placed and the method or methods used in introducing it into the hold. If cement
or other plugs were used, state the character of same and depth placed, from _____ feet
to _____ feet for each plug set.

Fluid 930' w/ 50 sax
Fluid 360' w/ 40 sx
Fluid 40' w/15 sx.
Rathole w/ 10 sx.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor D N B DRILLING, INC.
515 R. H. Garvey Building
Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.

James L. Donelson (employee of owner) or (owner or operator) of the
above-described well, being first duly sworn on oath, says: That I have knowledge of the
facts, statements, and matters herein contained and the log of the above-described well as
filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson
535 North Oliver
(Address)




SUBSCRIBED AND SWORN TO before me this 16 day of June, 19 83

Fred G. Arasmith
Notary Public.
STATE CORPORATION COMMISSION

My Commission expires: November 5, 1984

JUL 05 1983

CONSERVATION DIVISION
Wichita, Kansas



DNB Drilling, Inc.

ROTARY CONTRACTOR DRILLING DEALS

J. L. DONELSON, PRES.
(316) 687-5471

535 NORTH OLIVER P.O. BOX 8292C

WICHITA, KANSAS 67208

DRILLER'S LOG

S & K oil Company
Travis # 1
NW NW SW
Sec. 6-288-12W
Pratt, Co., Kansas

Commenced 6/1/83
Completed 6/11/83

Surface Casing: 359.65' 10 3/4" set @ 365'
w/300 sx. cement and 908.69' 8 5/8" set
@ 916' w/ 300 sx cement.

FORMATION

Surface hole
Shale
Shale and Sand
Shale
Shale and Lime
Lime

DEPTH

0 - 360
360 - 500
500 - 1030
1030 - 2565
2565 - 3635
3635 - 4480 RTD

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B Drilling, Inc.


James L. Donelson
James L. Donelson

STATE OF KANSAS ss:

Subscribed and sworn before me this 15th day of June 1983.

Fred G. Arasmith
Fred G. Arasmith - Notary Public

My commission expires November 5, 1984.



RECEIVED
STATE CORPORATION COMMISSION