


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

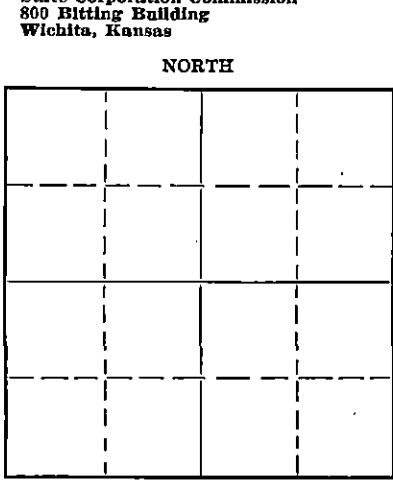

Locate well correctly on above Section Flat

Pratt County. Sec. 3 Twp. 28 Rge. (E)12 (W)  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW SW SW  
Lease Owner Rine - Roberts and Murphy  
Lease Name Rosenbaum Well No. 1  
Office Address 320 Central Building Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 4/3/50 19  
Application for plugging filed 4/26/50 (via telephone) 19  
Application for plugging approved 5/8/50 (via letter) 19  
Plugging commenced 4/26/50 19  
Plugging completed 5/5/50 19  
Reason for abandonment of well or producing formation  
Completed as dry hole  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes (via telephone)

Name of Conservation Agent who supervised plugging of this well Mr. C.D. Stough Great Bend, Kansas  
Producing formation None Depth to top Bottom Total Depth of Well 4610 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Sand	Water	0	190			
Shale	Shale	190	298	8-5/8"	298'	None
				5 1/2"	3958'	3390'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud from 4610' to 3482'

Rock bridge at 3482' with 5 sacks cement.

Heavy mud from bridge at 3482' to 390'.

Rock bridge at 390' with 15 sacks cement.

Bailed hole - OK

Heavy mud from bridge at 390' to 50'

Cement plug at 10' to base of cellar.

MAY 22 1950  
5-22-1950  
STATE CORPORATION COMMISSION  
KANSAS

(If additional description is necessary, use BACK of this sheet)  
Correspondence regarding this well should be addressed to The R. W. Rine Drilling Company  
Address 320 Central Building Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
E. H. Sloyer (employee of owner) or (owner/representative) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. H. Sloyer  
320 Central Building Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 20th day of May, 1950.

R. M. Green  
Notary Public.

My commission expires Dec. 29, 1952

PLUGGING  
FILE SEC-2 T-28 R12W  
BOOK PAGE 4 LINE 36

Rosenbaum Well No. 1

SW SW SW  
Sec. 3-28-12  
Pratt County, Kansas

Contractor: The R. W. Rine Drilling Company

Started: 3/4/50

Finished: 3/23/50

Log

Sand, gravel	0- 190	
Shale	190- 298	
Red bed, shale, shells	298-1100	8-5/8" with 250 sx. @ 298'.
Shale, shells	1100-1710	
Lime, shale	1710-1805	
Lime	1805-2075	
Lime, shale	2075-2355	
Lime	2355-2531	
Shale	2531-2705	
Shale, sandy lime	2705-2775	
Lime	2775-2920	
Lime, shale	2920-3322	
Brown lime	3322-3375	
Lime	3375-3500	
Brown lime	3500-3700	
Lime	3700-3765	
Sand lime	3765-3778	
Lime	3778-4005	
Lime, shale	4005-4203	
Sand lime	4203-4340	
Shale	4340-4362	
Lime	4362-4400	
Lime, shale	4400-4418	
Lime, shale	4418-4464	
Simpson Sand	4464-4506	
Shale	4506-4520	
Shale, lime	4520-4573	
Lime	4573-4610	5 1/2" with 100 sx. @ 3958'.

Schlumberger Tops

Brown Kansas City	3712'
White Kansas City	3730'
Mississippi	4173'
Kinderhook	4309'
Viola	4358'
Simpson Shale	4459'
Simpson Sand	4467'
Arbuckle	4558'
T. D.	4609'

State of Kansas )  
County of Sedgwick) ss

MAY 23 1950

I, E. H. Sloyer, do hereby certify that the above is a true and accurate log of the Rosenbaum Well No. 1 located in the SW SW SW of Sec. 3-28-12, Pratt County, Kansas.

*E. H. Sloyer*  
Secretary

Sworn to and subscribed before me this 20th day of May, 1950.

*R. M. Green*  
Notary Public

My commission expires Dec. 29, 1952

PLUGGING  
WELL NO. 3-T 28-12-12  
BOOK PAGE 4 LINE 36