

15-129-10331-0000

State of Kansas



FORM - CP-2

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
500 Insurance Bldg. 212 N. Market
WICHITA, KANSAS

VERBAL PERMIT FORM
(To Be Filed By Plugging Agent)

RECEIVED
STATE CORPORATION COMMISSION

AUG 19 1964

CONSERVATION DIVISION
Wichita, Kansas

J. P. Roberts
Assistant Director
500 Insurance Building
212 North Market
Wichita 2, Kansas

Dear Sir:

Mr. Macurren of Cities Service Oil Co. has this

date requested permission to plug the following described well:

Mr. Macurren guarantees payment of the plugging fee.

Operator's full Name: Cities Service Oil Co.

Complete Address: Box 1028 Guymon, Okla.

Lease Name: Stewart Well No. D-1

Location: C SE NE/4 Sec. 29 Twp. 34 Rge. 41 (E) (W)

County Morton Total Depth 5175' Oil Well X

Gas Well Input Well SWD Well D & A X Lost Hole

Mr. Macurren was instructed to plug the well as follows:

8 5/8"-1438' Circulated w/cement.

Mud 5175' to 4914' Spotted 20 Sax. cement 4914' to 4840'

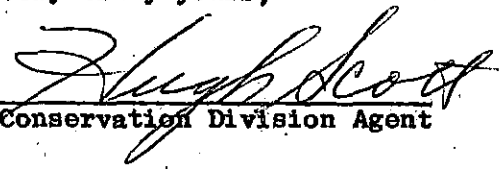
Mud 4840' to 4820' Spotted 20 Sax. cement 4820' to 4746'

Mud 4746' to 3275' Spotted 25 Sax. cement 3275' to 3183'

Mud 3183' to 3050' Spotted 25 Sax. cement 3050' to 2958'

Mud 2958' to 700' Spotted 35 Sax. cement 700' to 610'

Mud 610' to 45'
Plug, Hulls, 15 Sax. cement 45' to 0

Very truly yours,

Conservation Division Agent