

To: 1 090810
STATE CORPORATION COMMISSION
Wichita, State Office Bldg. - PLUGGING SECTION
130 S. Market, Room 2078
Wichita, KS 67202

5-6

API NUMBER 15- Spud date 12/14/46

J

C SW, SEC. 14, T. 34 S, R. 39 W

1320 feet from S section line

3960 feet from E section line

Lease Name Smith Young #1 Well # 1-14

County Stevens 90.25

Well Total Depth 2777 feet

Conductor Pipe: Size feet

Surface Casing: Size 10 3/4 feet 561

TECHNICIAN'S PLUGGING REPORT

Operator License # 4549

Operator: Anadarko Petroleum Corporation

Name:

Address P.O. Box 351

Liberal, KS 67905-0351

Abandoned Oil Well _____ Gas Well Input Well _____ SWD Well _____ O&A _____

Other well as hereinafter indicated _____

Plugging Contractor Halliburton Services License Number _____

Address _____

Company to plug at: Hour: _____ Day: 5 Month: 5 Year: 19 97

Plugging proposal received from Fred Cress

(company name) Anadarko Petroleum Corp. (phone) 316-544-7240

logs: 7" at 2619' w/300 sx cement, PBDT 2765', Slotted liner (5 1/2") at 2593-2777'

1st plug set CIBP at 2550',

2nd plug perforate at 610-611' and fill with cement.

Plugging Proposal Received by Steve Middleton
(TECHNICIAN)

Plugging Operations attended by Agent?: All _____ Part _____ None

Operations Completed: Hour: _____ Day: 6 Month: 5 Year: 1997

ACTUAL PLUGGING REPORT 1st plug set CIBP at 2560', loaded casing with mud, cement 960-400' per bond log,

2nd plug perforated at 610-611' and pumped 141 sx cement down 7" casing, gel spacer, and

9 sx cement. Cement circulated to surface.

RECEIVED
STATE CORPORATION COMMISSION
MAY 13 12:59 PM '97
5-18-1997

Remarks: Used 60/40 Pozmix 6% gel by Halliburton. No casing recovery.

(If additional description is necessary, use BACK of this form.)

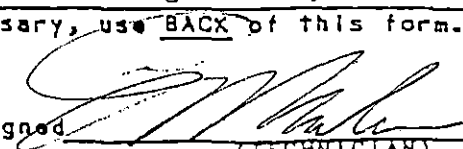
INVOICED (If you will, note) observe this plugging.

DATE MAY 14 1997

INV. NO. 48107

5-6

JUL 11 1997

Signed  (TECHNICIAN)