



JOHN ANDERSON, Jr. Governor
 RICHARD C. BYRD Chairman
 ALVIN F. GRAUERHOLZ Commissioner
 HARRY G. WILES Commissioner
 RAYMOND B. HARVEY Secretary
 CHARLES C. McCARTER Gen. Counsel

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
 500 Insurance Bldg. 212 N. Market
 WICHITA, KANSAS

VERBAL PERMIT FORM
 (To Be Filed By Plugging Agent)

15-129-10181-0000

RECEIVED
STATE CORPORATION COMMISSION

DEC 11 1962

J. P. Roberts
 Assistant Director
 500 Insurance Building
 212 North Market
 Wichita 2, Kansas

CONSERVATION DIVISION
 Wichita, Kansas

Dear Sir:

Mr. Dick Davis of Whitestone Petroleum Corp has this
 date requested permission to plug the following described well:

Mr. Dick Davis guarantees payment of the plugging fee.

Operator's full Name: Whitestone Petroleum Corp.

Complete Address: 900 Vaughn Bldg. Dallas, Texas.

Lease Name: M.R. Johns Well No. # 1

Location: C NE Sec. 12 Twp. 31 Rge. (E) (W) 42

County Morton Total Depth 5600' Oil Well

Gas Well X Input Well SWD Well D & A Lost Hole

Mr. Dick Davis was instructed to plug the well as follows:

8 5/8" 1649' Circulated w/cement. 4 1/2" 5518' Cemented.

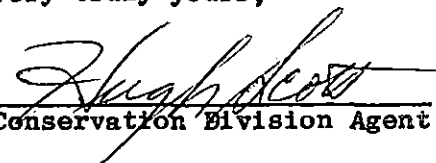
Baker steel plug set at 5160' and 6 sax.cement 5160' to 5100'

Top of perforations 4020'

Sand 5100' to 4000', 5 sax.cement 4000' to 3950', Mud 3950' to 600',

Plug and 35 sax.cement 600' to 500', Mud 500' to 50', Rock bridge 50'-40', 15 sax.cement 40' to Surface.

Very truly yours,


 Conservation Division Agent