
Form CP-3 Rev. 6-26-62

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

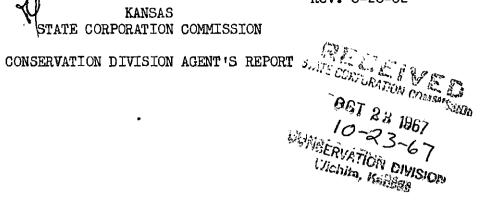

Operator's Full Name Getty Oil Company
Complete Address: Box 752, Drumright, Oklahoma 74030
Lease Name F.E. Dufield Well No. 1
Location App C SW NE Sec. 14 Twp. 32 Rge. 32 (E) (W)
County Seward Total Depth 7280:
Abandoned Oil Well Gas Well X Input Well SWD; Well D & A X
Other well as hereafter indicated: None
Plugging Contractor: Sargents Casing Pulling Co.
Address: Box 506, Liberal, Kansas License No. 511
Operation Completed: Hour 2:30 Pm Day 19 Month 10 Year 1967
The Above well was plugged as follows:
8 5/8" to 2203' cirulated w/ cement. 4 1/2" to 6200' cemented.
Top perforations 2726 Plug, bottom w/ 20 sacks cement.
Top of cement 2480: Mud 2480: to 600:
Spotted 40 sacks cement 600' to 500' Mud 500' to 35'
Plug. Hulls & 10 sacks cement 35' to 0' Company Pump
Pulled 2192' of 4 1/2" casing.

I hereby certify that the above well was plugged as herein stated.
DATE 10/25/67 INV. NO. 6542-W